


MATERIALS:

Shielded: 0.20mm Thickness Copper Alloy With Nickel




Housing: Standard Material Glass Filled Polyester UL 94V-0 Standard Colour(Black)

Contact: 0.35mm Thickness Alloy C5191,Gold Plating Over Nickel in Contact Area,

Gold Plating: Selective Gold Plating Tin Plating Over Nickel in Solder Area

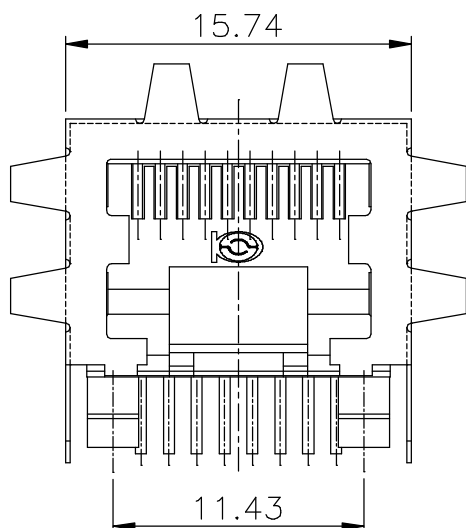

PCB LAYOUT/TOP VIEW

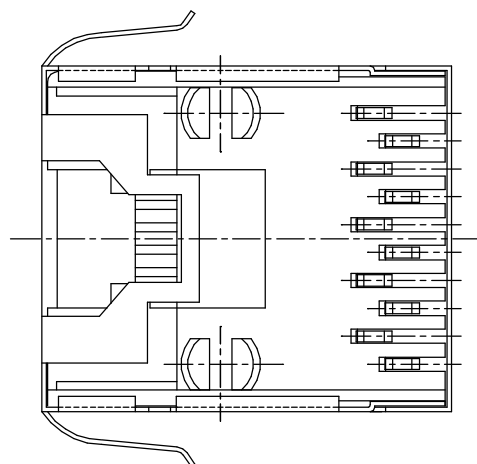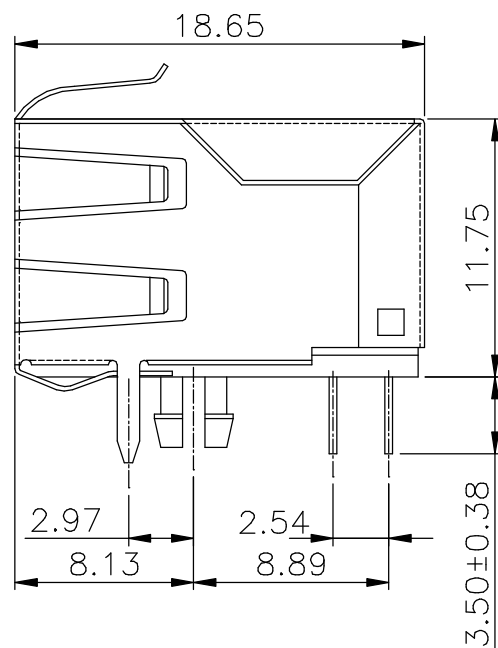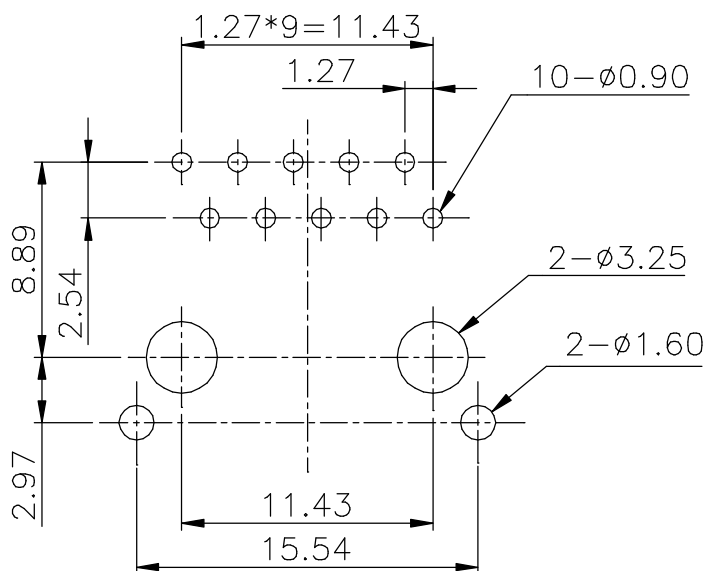

修正 REVISION	日期 DATE	容許公差 TOLERANCE	品名 Side Entry PCB Jack ARTICLE (SHIELDED TH TYPE)			
		.XXX ±0.10	圖號 3014S-8P10C DWG NO.			
		.XX ±0.25				
		.X ±0.38				
		X ±0.50				
		核准 APPD.	單位 UNIT	比例 SCALE	張數 SHEET	版本 REV.
		校對 CHKD.	mm	3/1	1/1	A
		設計 DR.				