

LED – Light Emitting Diode


1-05-04-12

Module No.: W03304PGSC-W1

Features:

Ø3mm
PURE GREEN
Water Clear
Super Bright

Dimensions

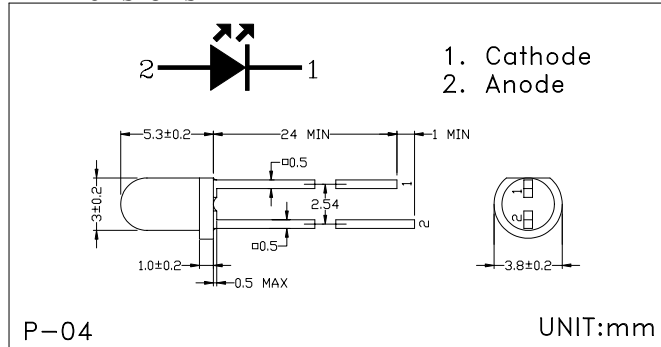

Absolute Maximum Ratings

(Ta=25°C)

Descriptions	Symbol	Value	Unit
Continuous Forward Current	I _F	30	mA
Peak Forward Current *1	I _{FM}	35	mA
Reverse Voltage	V _R	5	V
Operating Temperature	T _{opr}	-25 ~ +65	°C
Storage Temperature	T _{stg}	-25 ~ +85	°C
Soldering Temperature *2	T _{sol}	260	°C

*1 Duty ratio = 1/10, Pulse width = 0.1ms.

*2 At the position of 2mm from the bottom face of resin package within 5 sec.


Electro-optical Characteristics

(Ta=25°C)

Descriptions	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward Voltage	V _F	I _F =20mA		3.6	4.5	V
Luminous Intensity *3	I _v	I _F =20mA	4300	7850		mcd
Peak Emission Wavelength	λ _p	I _F =20mA		515		nm
Spectrum Radiation Bandwidth	Δλ	I _F =20mA		20		nm
Half Power Beam Angle	Δθ			±20		deg.
Terminal Capacitance	C _t			25		pF
Response Frequency	f _c			8		MHz

*3 Tolerance: ±30%

Luminous Intensity vs
Forward Current

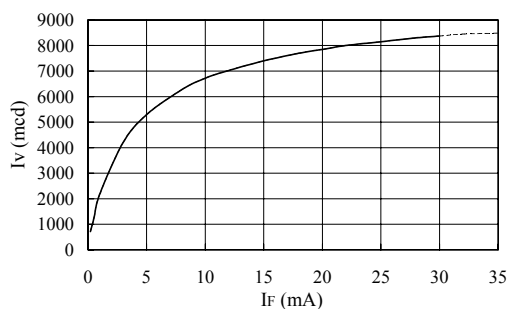

Radiation Diagram

