
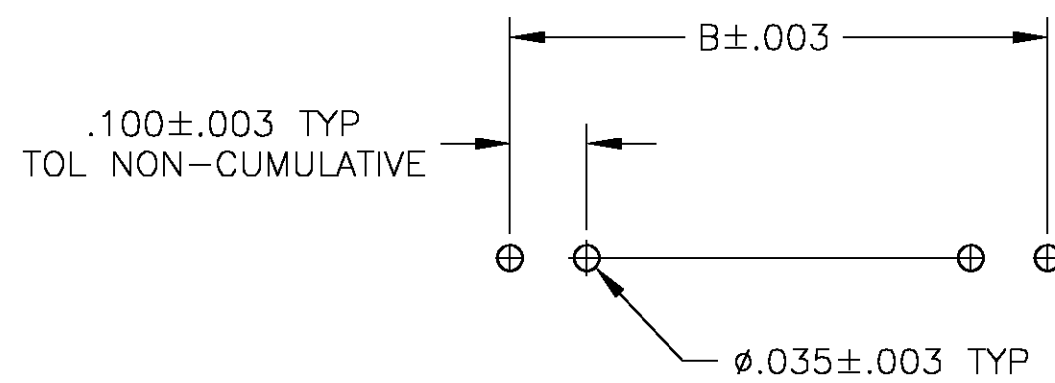
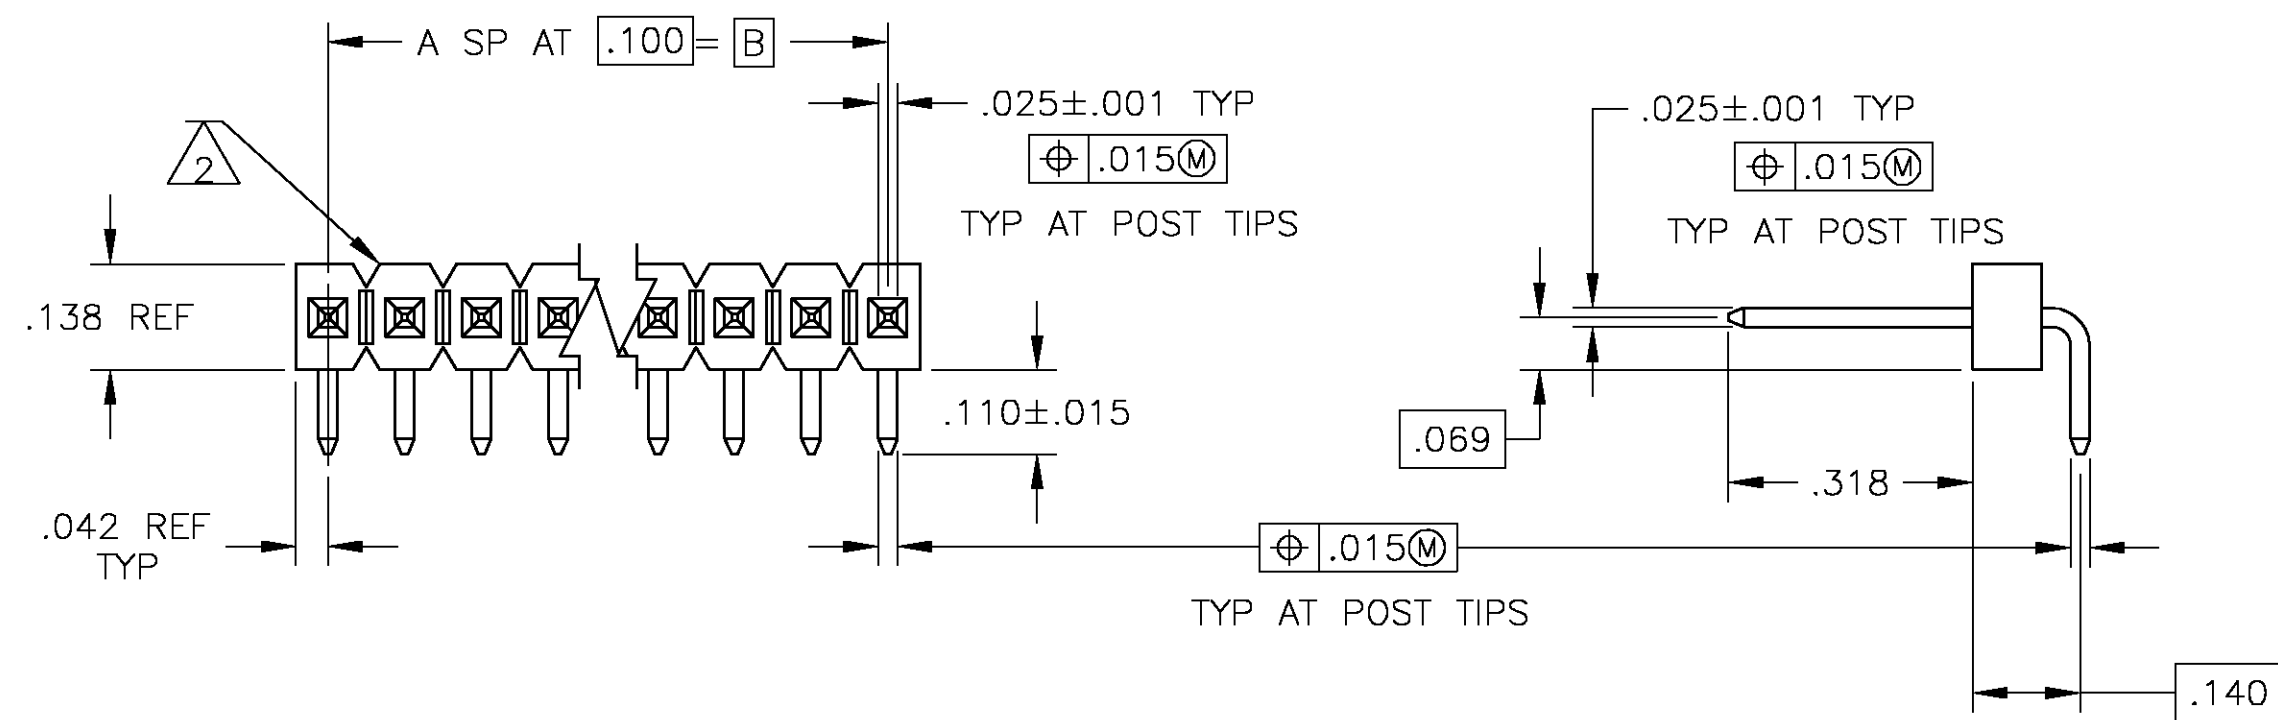


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			K	EC 0G3C 0195 05	28MAY05	BSV	JLG

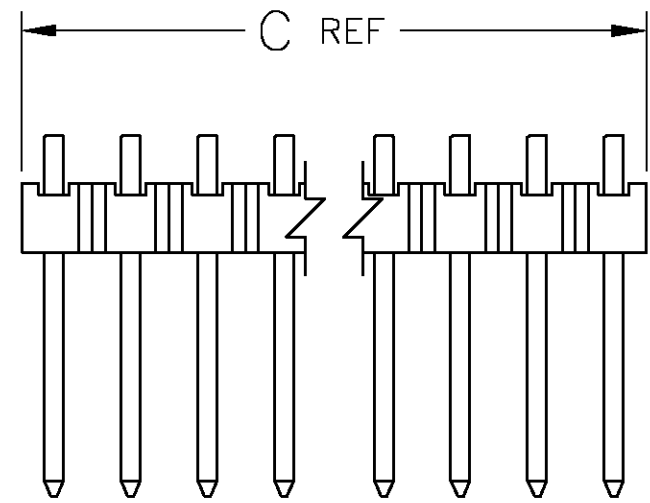

RECOMMENDED HOLE LAYOUT

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
2. BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
3. .000100--.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
4. .000100--.000200 BRIGHT TIN OVER .000050 NICKEL.
5. PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
6. HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.
POSTS: PHOS BRONZE
7. .000100--.000200 MATTE TIN OVER .000050 NICKEL.

△	3.984	3.900	39	40	9-103323-0
△	3.884	3.800	38	39	8-103328-9
△	3.784	3.700	37	38	8-103328-8
△	3.684	3.600	36	37	8-103328-7
△	3.584	3.500	35	36	8-103328-6
△	3.484	3.400	34	35	8-103328-5
△	3.384	3.300	33	34	8-103328-4
△	3.284	3.200	32	33	8-103328-3
△	3.184	3.100	31	32	8-103328-2
△	3.084	3.000	30	31	8-103328-1
△	2.984	2.900	29	30	8-103328-0
△	2.884	2.800	28	29	7-103323-9
△	2.784	2.700	27	28	7-103323-8
△	2.684	2.600	26	27	7-103323-7
△	2.584	2.500	25	26	7-103323-6
△	2.484	2.400	24	25	7-103323-5
△	2.384	2.300	23	24	7-103323-4
△	2.284	2.200	22	23	7-103323-3
△	2.184	2.100	21	22	7-103323-2
△	2.084	2.000	20	21	7-103323-1
△	1.984	1.900	19	20	7-103323-0
△	1.884	1.800	18	19	6-103323-9
△	1.784	1.700	17	18	6-103323-8
△	1.684	1.600	16	17	6-103323-7
△	1.584	1.500	15	16	6-103323-6
△	1.484	1.400	14	15	6-103323-5
△	1.384	1.300	13	14	6-103323-4
△	1.284	1.200	12	13	6-103323-3
△	1.184	1.100	11	12	6-103323-2
△	1.084	1.000	10	11	6-103323-1
△	.984	.900	9	10	6-103323-0
△	.884	.800	8	9	5-103323-9
△	.784	.700	7	8	5-103323-8
△	.684	.600	6	7	5-103323-7
△	.584	.500	5	6	5-103323-6
△	.484	.400	4	5	5-103323-5
△	.384	.300	3	4	5-103323-4
△	.284	.200	2	3	5-103323-3
△	.184	.100	1	2	5-103323-2
△	.084	—	—	1	5-103323-1
PLATING	C	B	A	NO OF POSN	PART NUMBER

A	$\frac{4}{3}$	.184	.100	1	2	4-103323-2
	$\frac{4}{4}$	3.984	3.900	39	40	4-103323-1
	$\frac{3}{2}$	3.984	3.900	39	40	4-103323-0
	$\frac{3}{3}$	3.884	3.800	38	39	3-103323-9
	$\frac{3}{4}$	3.784	3.700	37	38	3-103323-8
	$\frac{3}{5}$	3.684	3.600	36	37	3-103323-7
	$\frac{3}{6}$	3.584	3.500	35	36	3-103323-6
	$\frac{3}{7}$	3.484	3.400	34	35	3-103323-5
	$\frac{3}{8}$	3.384	3.300	33	34	3-103323-4
	$\frac{3}{9}$	3.284	3.200	32	33	3-103323-3
	$\frac{3}{10}$	3.184	3.100	31	32	3-103323-2
	$\frac{3}{11}$	3.084	3.000	30	31	3-103323-1
	$\frac{3}{12}$	2.984	2.900	29	30	3-103323-0
	$\frac{3}{13}$	2.884	2.800	28	29	2-103323-9
	$\frac{3}{14}$	2.784	2.700	27	28	2-103323-8
	$\frac{3}{15}$	2.684	2.600	26	27	2-103323-7
	$\frac{3}{16}$	2.584	2.500	25	26	2-103323-6
	$\frac{3}{17}$	2.484	2.400	24	25	2-103323-5
	$\frac{3}{18}$	2.384	2.300	23	24	2-103323-4
	$\frac{3}{19}$	2.284	2.200	22	23	2-103323-3
	$\frac{3}{20}$	2.184	2.100	21	22	2-103323-2
	$\frac{3}{21}$	2.084	2.000	20	21	2-103323-1
	$\frac{3}{22}$	1.984	1.900	19	20	2-103323-0
	$\frac{3}{23}$	1.884	1.800	18	19	1-103323-9
	$\frac{3}{24}$	1.784	1.700	17	18	1-103323-8
	$\frac{3}{25}$	1.684	1.600	16	17	1-103323-7
	$\frac{3}{26}$	1.584	1.500	15	16	1-103323-6
	$\frac{3}{27}$	1.484	1.400	14	15	1-103323-5
	$\frac{3}{28}$	1.384	1.300	13	14	1-103323-4
	$\frac{3}{29}$	1.284	1.200	12	13	1-103323-3
	$\frac{3}{30}$	1.184	1.100	11	12	1-103323-2
	$\frac{3}{31}$	1.084	1.000	10	11	1-103323-1
	$\frac{3}{32}$	.984	.900	9	10	1-103323-0
	$\frac{3}{33}$	.884	.800	8	9	103323-9
	$\frac{3}{34}$	.784	.700	7	8	103323-8
	$\frac{3}{35}$	.684	.600	6	7	103323-7
	$\frac{3}{36}$	.584	.500	5	6	103323-6
	$\frac{3}{37}$	.484	.400	4	5	103323-5
	$\frac{3}{38}$	.384	.300	3	4	103323-4
	$\frac{3}{39}$	.284	.200	2	3	103323-3
	$\frac{3}{40}$	.184	.100	1	2	103323-2
$\frac{3}{41}$	.084	—	—	1	103323-1	
PLATING	C	B	A	NO OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.						DWN	180CT92	ttyco	Tyco Electronics Corporation	
						CHK	J MARTINELLI	Harrisburg, Pa 17105-3608		
						DWG NO	23N0V02	Electronics		
						BY	B FLINCHBAUGH			
DIMENSIONS: INCHES 						NAME				
						HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100 , RIGHT ANGLE, WITH .025 SQUARE POSTS				
TOLERANCES UNLESS OTHERWISE SPECIFIED: P L C ± . L C ± . C ± .005 ANGLES ± . FINISH SEE TABLE						PRODUCT SPEC				
						APPLICATION SPEC				
MATERIAL: 						SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
						A1		00779	C=103323	-
CUSTOMER DRAWING						SCALE		SHEET	REV	
						4:1		1 of 1	K	