



3.6"x10mm Glass Tube Fuse

華德電子股份有限公司

Wade ELECTRONIC CO., LTD.




TAP

TAP Series Time Lag Type With Pigtail



Unit: mm

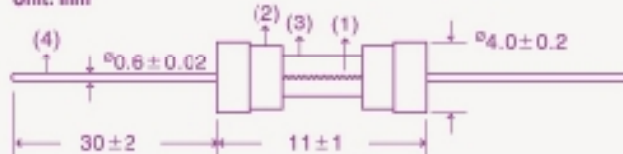

Structure

No.	Component	Material
1	Wire	Alloy
2	Cap	Brass with nickel plated
3	Body	Glass tube
4	Lead	Tinned copper wire

Electrical characteristics

Rated current	200%	500%	1000%
100 mA-6.3A	Max.	Min.	Min.
	60 Sec.	60 mS	10 mS

Breaking capacity

50 A	125 V / 250 V	A C
------	---------------	-----

Temperature character


When 100% of rating the temperature rise doesn't exceed 75°C.

Approvals

Catalogue number	Rated current	Voltage	UL	UL	SP
TAP	100 mA-6.3A	125V / 250V	●	●	●


● Approved 已認證 ○ Pending 認證中

FAP



FAP Series Fast Acting Type With Pigtail

Unit: mm

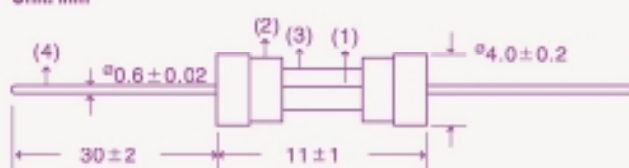

Structure

No.	Component	Material
1	Wire	Alloy
2	Cap	Brass with nickel plated
3	Body	Glass tube
4	Lead	Tinned copper wire

Electrical characteristics

Rated current	200%
100 mA-6.3A	Max.
	60 Sec.

Breaking capacity

50 A	125 V / 250 V	A C
------	---------------	-----

Temperature character

When 100% of rating the temperature rise doesn't exceed 75°C.

Approvals

Catalogue number	Rated current	Voltage	UL	UL	SP
FAP	100 mA-6.3A	125V / 250V	●	●	●

● Approved 已認證 ○ Pending 認證中

FAP	
Rating	Norminal Melting(A ² Sec)
100mA	<i>0.001600</i>
125mA	<i>0.005000</i>
150mA	<i>0.006000</i>
160mA	<i>0.006000</i>
200mA	<i>0.016000</i>
250mA	<i>0.025000</i>
300mA	<i>0.035000</i>
315mA	<i>0.041000</i>
350mA	
375mA	<i>0.072000</i>
400mA	<i>0.080000</i>
500mA	<i>0.153000</i>
600mA	<i>0.218000</i>
630mA	<i>0.279000</i>
700mA	<i>0.454000</i>
750mA	<i>0.505000</i>
800mA	<i>0.520000</i>
1A	<i>0.913000</i>
1.25A	<i>1.480000</i>
1.5A	<i>2.120000</i>
1.6A	<i>3.620000</i>
2A	<i>2.660000</i>
2.5A	<i>4.230000</i>
3A	<i>6.300000</i>
3.15A	<i>7.710000</i>
3.5A	<i>9.120000</i>
4A	<i>11.500000</i>
5A	<i>17.200000</i>
6A	<i>24.500000</i>
6.3A	<i>28.400000</i>
7A	<i>37.000000</i>
8A	
9A	
10A	
11A	
12A	
13A	
14A	
15A	
PS : 以上數值僅供參考 Above Norminal Melting vaules are for reference only. 若有其它需求請與業務人員聯絡 If you need other ratings please don't hesitate to contact the salesperson.	

001

TAP	
Rating	Norminal Melting(A ² Sec)
100mA	0.02000
125mA	0.03600
150mA	0.05300
160mA	0.10000
200mA	0.12000
250mA	0.13000
300mA	0.13200
315mA	0.13300
350mA	0.14200
375mA	0.21100
400mA	0.36100
500mA	0.49600
600mA	0.55000
630mA	0.57000
700mA	
750mA	1.07000
800mA	1.09000
1A	3.37000
1.25A	5.22000
1.5A	7.50000
1.6A	7.51000
2A	16.60000
2.5A	27.40000
3A	42.90000
3.15A	46.20000
3.5A	49.60000
4A	67.70000
5A	110.00000
6A	111.00000
6.3A	112.00000
7A	
8A	
9A	
10A	
11A	
12A	
13A	
14A	
15A	
002 PS : 以上數值僅供參考 Above Norminal Melting vaules are for reference only. 若有其它需求請與業務人員聯絡 If you need other ratings please don't hesitate to contact the salesperson.	