
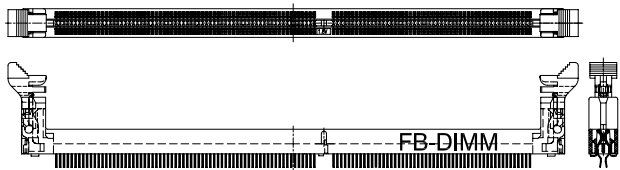
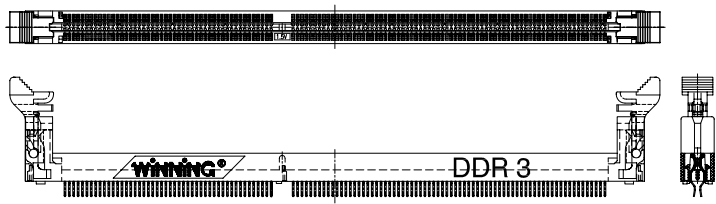

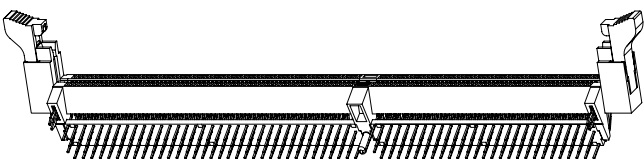
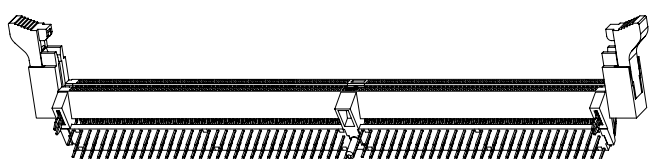






DDR Series Product Listing

DDR,DDR2,DDR3,FB-DIMM,SO-DIMM

1 of 3

	
WDD2S 240 A 8(9) N 1 1 B 3 U W FB DIMM 240P Envelop DIP TYPE(Strip Form Pin Metal Posts) 8:FBD TYPE Short Pin(2.8mm) 9:FBD TYPE Long Pin(3.18mm)	WDD2S 240 A A N 1 1 B 1 U FB DIMM 240P Envelop Straddle Type A: FBD Type Straddle Type
	
WDD3S 240 A 4 N 1 1 B 4 U W DDR3 240P Envelop Straddle Type 4:Straddle	WDD3S 240 A 1(5) N P 1 B 3 U W DDR3 240P Envelop DIP Type (Metal Posts) 1: Short Pin(2.8mm) 5: Long Pin(3.18mm)
	
WDD2S 2 240 A 3(4) L 1 1 B 3 U W FB DIMM 240P 25D DIP Type 2:25° 3:FBD(Full Buffer DIMM)(2.70mm) 4:FBD(Full Buffer DIMM)(3.20mm)	WDD2S 2 240 A 2(1) L 1 B 3 U W DDR2 240P 25D DIP Type 2:25° 1:Short Pin(2.70mm) 2:Long Pin(3.20mm)
	
WDD2S 9 240 A 3(4) L 1 1 B 3 U W FB DIMM 240P 90D DIP Type 9:90° 3:FBD(Full Buffer DIMM)(2.70mm) 4:FBD(Full Buffer DIMM)(3.20mm)	WDD2S 9 240 A 1(2) L 1 1 B 3 U W DDR2 240P 90D DIP Type 9:90° 1:Short Pin(2.70mm) 2:Long Pin(3.20mm)
	
WDR2S 240 A 1 N 1 1 B 4 U W DDR2 240P DIP TYPE(Strip Form Pin None Posts) 4: None Posts(Dip type)	WDD2S 240 A 1(5) N 1 1 B 3 U W DDR2 240P Envelop DIP TYPE(Strip Form Pin Metal Posts) 1:Short Pin(2.8mm) 5:Long Pin(3.18mm)

" _ "CONTACT PLATING:Selective Gold A:Flash B:5u" C:10u" D:15u" E: 20U" F: 30U"


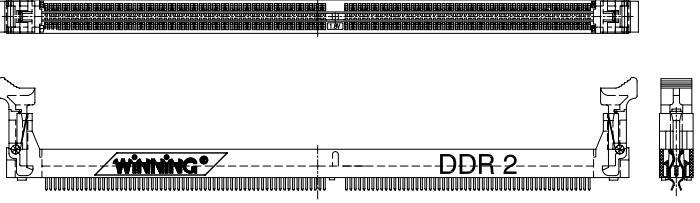
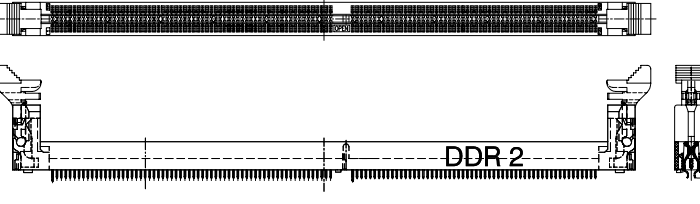
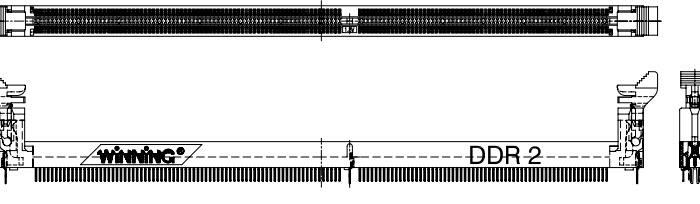


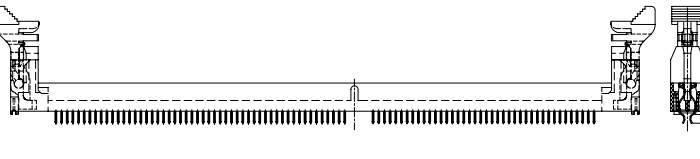
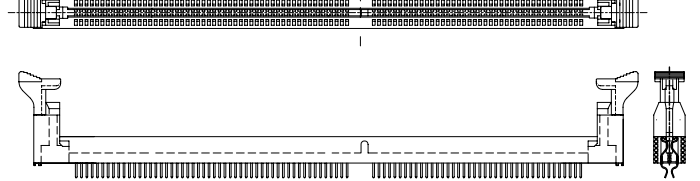
REV:2007.04.25

" = "INSULATOR MATERIAL: L=LCP S=SPS P=PPS N4=NYLON46 N=Nylon66

DDR Series Product Listing

DDR,DDR2,DDR3,FB-DIMM,SO-DIMM

2 of 3

	
WDR2S 240 <u>A</u> <u>1</u>(3/5) <u>N</u> 1 1 B 3 U W DDR2 240P DIP TYPE(Strip Form Pin Metal Post) 1:Short pin(2.80) 3:Short pin(2.55) 5:Long pin(3.18)	WDR2S 240 <u>D</u> <u>4</u> <u>N</u> 1 1 B 3 U W DDR2 240P Straddle Type(Strip Form Pin) 4: Straddle Type
	
WDD2S 240 <u>A</u> <u>B</u> <u>1</u> 1 1 B 1 U DDR2 240P Envelop Straddle Type(1.85) B: Straddle Type(1.85mm)	WDD2S 276 <u>D</u> <u>1</u> <u>N</u> 1 1 B 3 U W DDR2 276P Shield Strip Pin(Metal Posts) 1:Short Pin(2.80mm)
	
W2DRN 184 <u>A</u> 2 <u>5</u> 3 <u>N</u> 2 B 1 DDR 184P DIP Type(Pothook) 5:Short Pin(2.85) 3: Metal Posts(2.75)	W2DR 184 <u>A</u> 2 <u>5</u> 3 <u>N</u> 2 B 1 DDR 184P DIP Type(Common Type) 5:Short Pin(2.85) 3: Metal Posts(2.75)
	
W2DRN-184 <u>A</u> 2 <u>9</u> 1 <u>N</u> 2 B 1 U DDR 184P Straddle Type(2.0mm) 9:Straddle(2.0)	W2DR 184 <u>A</u> 2 <u>4</u> 1 <u>N</u> 2 B 1 U DDR 184P Straddle Type 4:Straddle
	
WPMR 184 <u>A</u> <u>4</u> <u>N</u> 3 B 1 U DDR 184 Straddle Type(5.80mm)(2.5V) 4:Straddle	WPMR2 240 <u>A</u> <u>4</u> <u>N</u> 3 B 1 U DDR2 240 Straddle Type(5.80mm)(1.8V) 4:Straddle


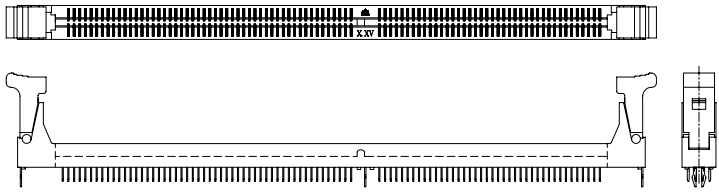


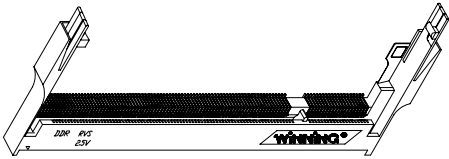
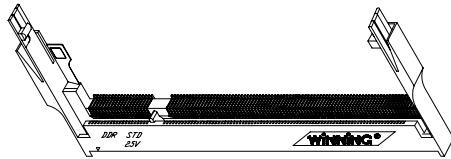
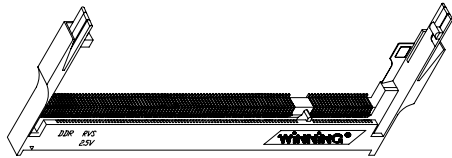
"_ "CONTACT PLATING:Selective Gold A:Flash B:5u" C:10u" D:15u" E: 20U" F: 30U"

"="INSULATOR MATERIAL: L=LCP S=SPS P=PPS N4=NYLON46 N=Nylon66

REV:2007.04.25

DDR Series Product Listing

DDR,DDR2,DDR3,FB-DIMM,SO-DIMM

	
W2DRD 2 184 A B 9 R U W 2 DDR 184P 25D 1.9Pitch Right Side Type 2:25" 9:1.9pitch R:RIGHT SIDE TYPE	W2DRD 184 A 2 5 3 L 2 B U DDR 184P DIP Type (Loose Pins) 5:Short Pin(2.85)
	
W2DRD 2 184 A B 6 L U W 2 DDR 184P 25D 1.6 Pitch Left Side Type 2:25" 6:1.6pitch	W2DRD 2 184 A B 9 L U W 2 DDR 184P 25D 1.9Pitch Left Side Type 2:25" 9:1.9pitch L:LEFT SIDE TYPE
	
WSDD 200 A C(D) L 3 2 P R U W SO DIMM 200P RVS TYPE(PLASTIC EAR) Assemble C:2.5V D:1.8V	WSDD 200 A C(D) L 3 2 P S U W SO DIMM 200P STD TYPE(PLASTIC EAR) Assemble C:2.5V D:1.8V
	
	WSDD 200 A C(D) L 3 2 P R U W SO DIMM 200P RVS TYPE(PLASTIC EAR) Assemble C:2.5V D:1.8V

"_ "CONTACT PLATING:Selective Gold A:Flash B:5u" C:10u" D:15u" E: 20U" F: 30U"

"="INSULATOR MATERIAL: L=LCP S=SPS P=PPS N4=NYLON46 N=Nylon66

REV:2007.04.25