

Edixeon Secondary Optical Lens Series Datasheet

Features :

- High Efficiency
- Available in various beams
- Total internal reflection technology
- Suitable for "Lambertian" type design and Edixeon LEDs
- New single piece, housing or housing-less design for easier assembly, improved high
- Performance/cost ratio

Typical Applications :

- Reading Lamps
- Architectural Lighting
- Streets Lighting
- Decoration Lights
- Downlights

General Characteristics :

- Lens Material: Optical Grade PMMA and PC
- Housing Material: PC
- Operating Temperature Range: -40°C / + 70°C
- Storage Temperature Range: -40°C / + 70°C

Usage and Maintenance :

1. Clean Lenses with mild soap and water and a soft cloth.
2. Do not use any commercial cleaning solvents on lenses, like alcohol.
3. Please handle or install lenses with wearing gloves, skin oils may damage lens or optical characteristic.

Secondary Lens Series List

General Information	7
---------------------------	---

Secondary Lens AA Series

	13LNE0AA1002 Specification.....	8
	13LNE0AA15xx Specification	9
	13LNE0AA25xx Specification	10
	13LNE0AA38xx Specification	11
	13LNE0AA38xx Specification	12
	13LNE0AA45xx Specification	13

Secondary Lens AT Series

	13LNE0AT2501 Specification	14
	13LNE0AT5001 Specification	15



13LNE0AT3801 Specification	16
----------------------------------	----



13LNE0AT6001 Specification	17
----------------------------------	----



13LNE0AT4001 Specification	18
----------------------------------	----

Secondary Lens AB Series



13LNE0AB3501 Specification	19
----------------------------------	----



13LNE0AB4501 Specification	20
----------------------------------	----



13LNE0AB6001 Specification	21
----------------------------------	----

Secondary Lens AUZ Series



13LNE0AUZ101 Specification	22
----------------------------------	----

Secondary Lens 3in1 Series

	13LNE0AC3001 3in1 Specification	23
	13LNE0AC4501 3in1 Specification	24
	13LNE0AC6001 3in1 Specification	25
	13LNE0AC8001 3in1 Specification	26
	13LNE0AE4501 3in1 Specification	27
	13LNE0AE6001 3in1 Specification	28

Secondary Lens 6in1 Series

	13LNE0AE18xx 6in1 Specification	29
	13LNE0AT2004 6in1 Specification	30



13LNE0DK40xx 6in1 Specification	31
---------------------------------------	----



13LNE0COA0xx 6in1 Specification.....	32
--------------------------------------	----

Secondary Lens 9in1 and 12in1 Series



13LNE0AG25xx 9in1 Specification	33
---------------------------------------	----



13LNE0BZ25xx 9in1 Specification.....	34
--------------------------------------	----



13LNE0BZ50xx 9in1 Specification	35
---------------------------------------	----



13LNE0AM25xx 12in1 Specification.....	36
---------------------------------------	----

Secondary Lens 36in1 Series



13LNE0AH25xx 36in1 Specification.....	37
---------------------------------------	----



13LNE0AH45xx 36in1 Specification.....	38
---------------------------------------	----

Package Information	39
---------------------------	----

Revision History	41
------------------------	----

About Edison Opto	41
-------------------------	----

General Information

Introduction

To provide the handy optical kits for all sorts of lighting, Edison Opto develop and support all kinds of secondary optics which can meet the self-development components of Edison Opto's perfectly. It contains a lens and a reflector.

Ordering Code Format

<u>1</u> X1		<u>3</u> X2		<u>L N</u> X3		<u>E O</u> X4		<u>X X</u> X5		<u>X X</u> X6		<u>X X</u> X7	
X1		X2		X3		X4		X5		X6		X7	
Category		Type		Sort		Component		Internal code		Beam Angle		Serial Number	
1	Material	3	L2~L6	LN	Lens	E0	Edixeon	--	--	01~18	01~18	--	--
										20	18.5~22.5		
										25	22.6~27.5		
										30	27.6~32.5		
										35	32.6~37.5		
										40	37.6~42.5		
										45	42.6~47.5		
										50	47.6~55.0		
										60	55.1~65.0		
										70	65.1~75.0		
										80	75.1~85.0		
										90	85.1~95.0		
										A0	95.1~105.0		
										A1	105.1~115.0		
										A2	115.1~125.0		
										A3	125.1~135.0		
										A4	135.1~145.0		
										Z0	1550		
										Z1	50130		
										Z2	75135		
										Z3	40130		
										Z4	3065		
										Z5	2535		
										Z6	3040		

13LNE0AA1002 Specification

For Edixeon Single Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Edixeon Star*1.6mm
- $30 \times 30 \times 1.6\text{mm}$
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001 (R1)	1600	15°	29°

Note: Emitter flux is 115lm @350mA

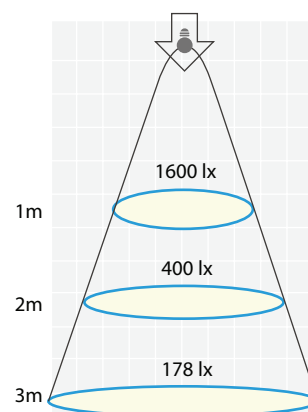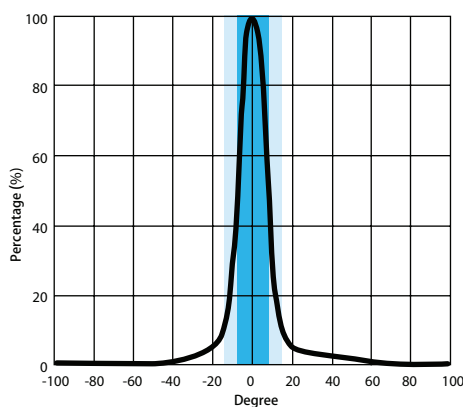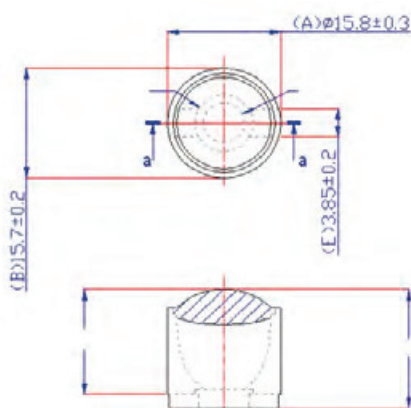

13LNE0AA15xx Specification

For Edixeon Single Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- $30 \times 30 \times 1.6\text{mm}$
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001 (R1)	1274	16°	42°

Note: Emitter flux is 115lm @350mA

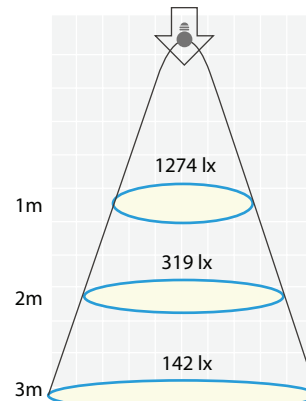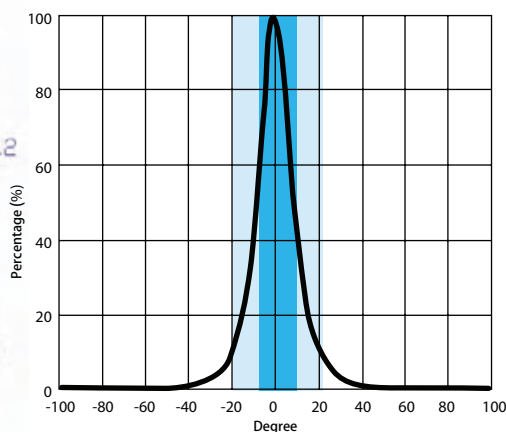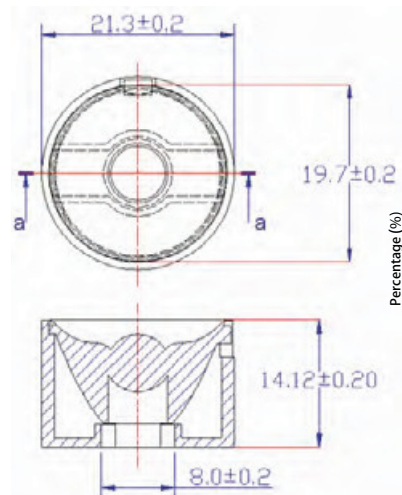

13LNE0AA25xx Specification

For Edixeon Single Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- $30 \times 30 \times 1.6\text{mm}$
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001 (R1)	1483	22°	46°

Note: Emitter flux is 115lm @350mA

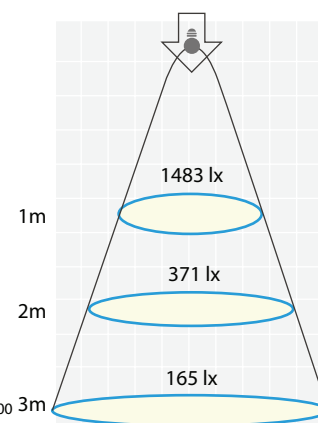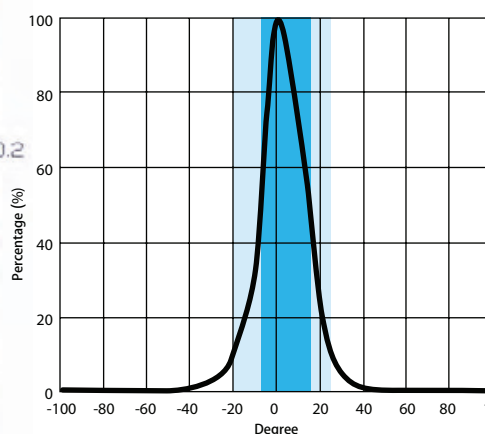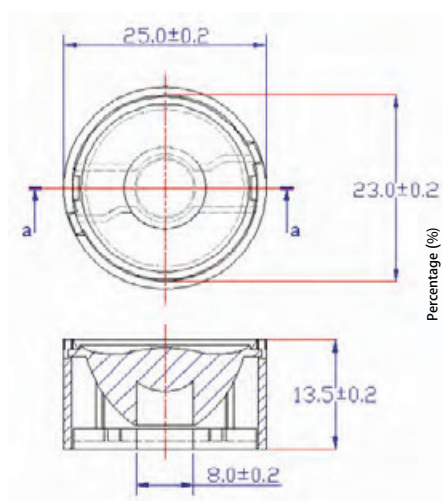

13LNE0AA38xx Specification

For Edixeon Single Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature -40°C ~ +70°C (Upper limit +80°C)
- 30*30*1.6mm
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001 (R1)	433	29°	57°

Note: Emitter flux is 115lm @350mA

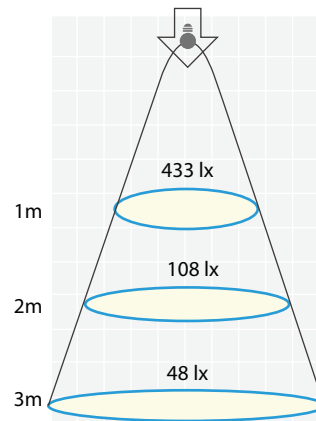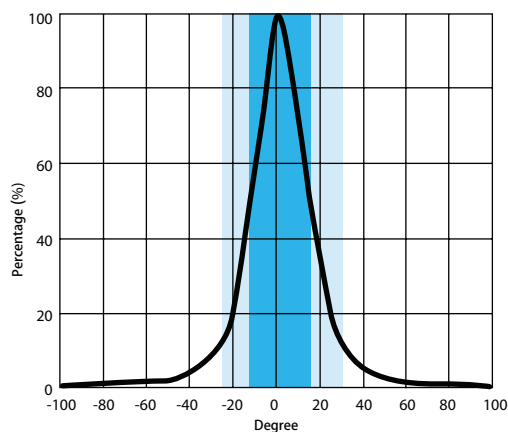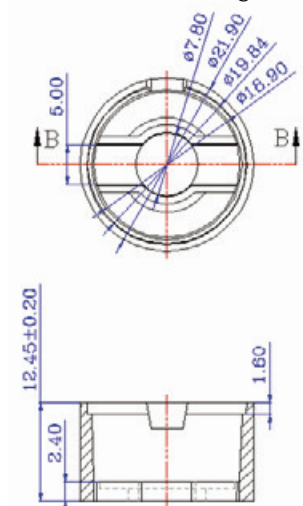

13LNE0AA38xx Specification

For Edixeon Single Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- $30 \times 30 \times 1.6\text{mm}$
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001 (R1)	340	29°	65°

Note: Emitter flux is 115lm @350mA

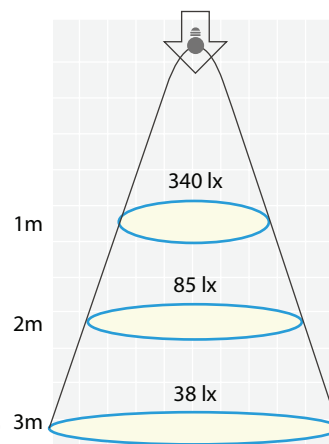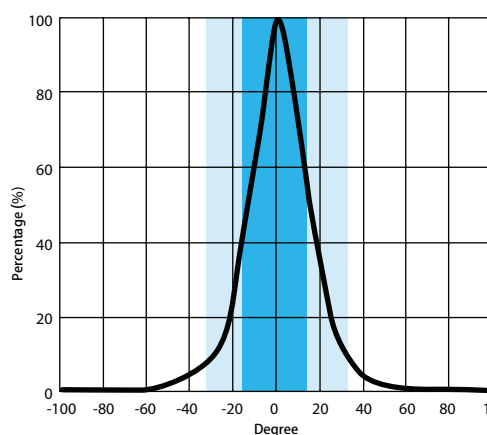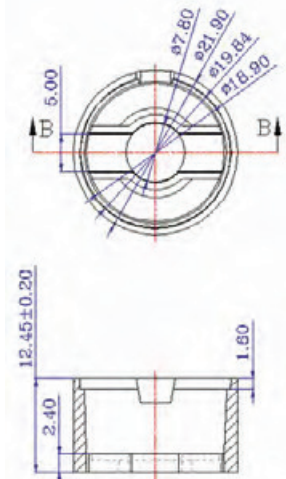

13LNE0AA45xx Specification

For Edixeon Single Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- $30 \times 30 \times 1.6\text{mm}$
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001 (R1)	211	33°	73°

Note: Emitter flux is 115lm @350mA

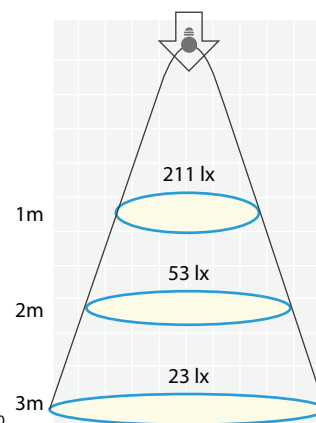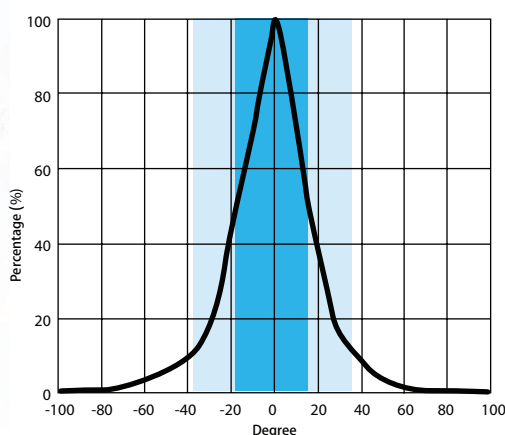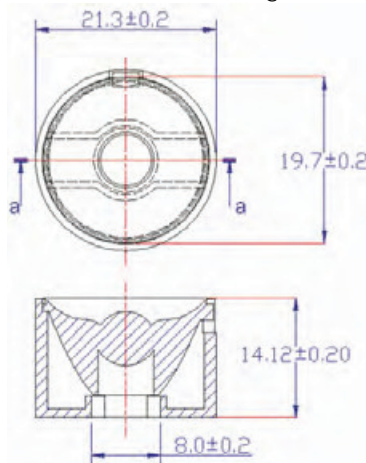

13LNE0AT2501 Specification

For Edixeon Single Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight




Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Edixeon Star*1.6mm
- 30*30*1.6mm
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001 (R1)	2130	25°	52°

Note: Emitter flux is 115lm @350mA

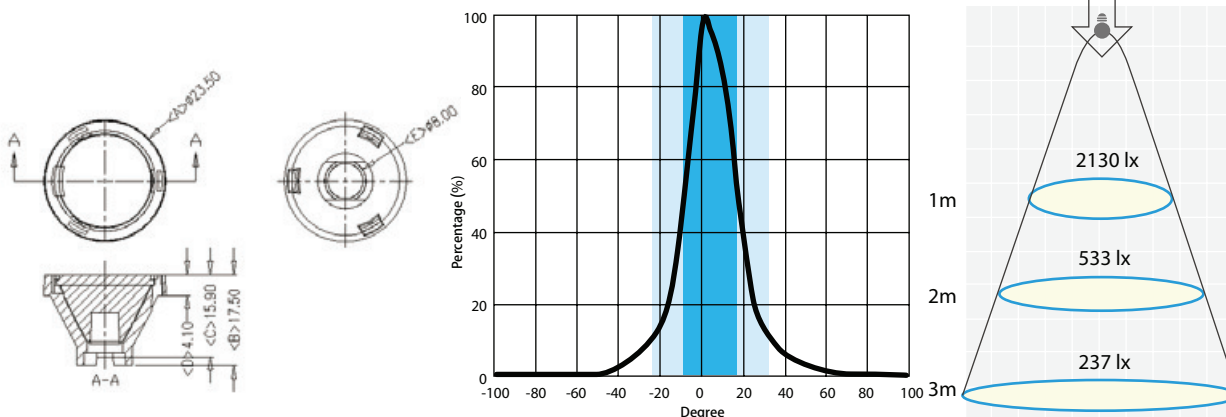

13LNE0AT5001 Specification

For Edixeon Single Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Edixeon Star*1.6mm
- 30*30*1.6mm
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001 (R1)	805	30°	61°

Note: Emitter flux is 115lm @350mA

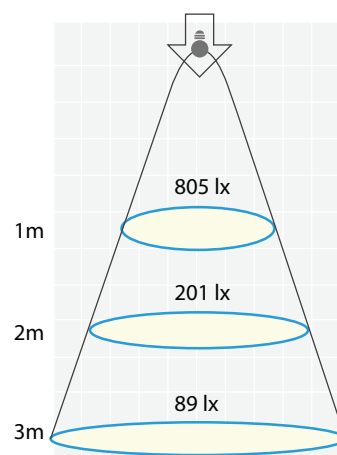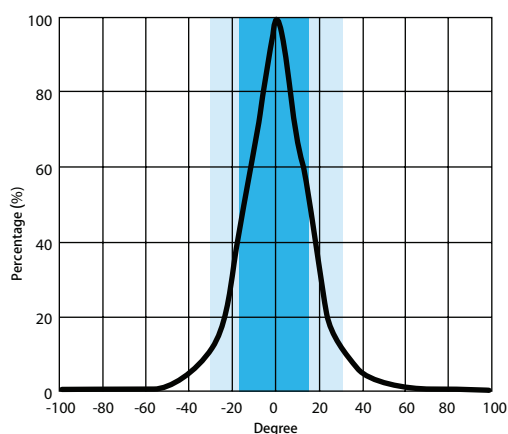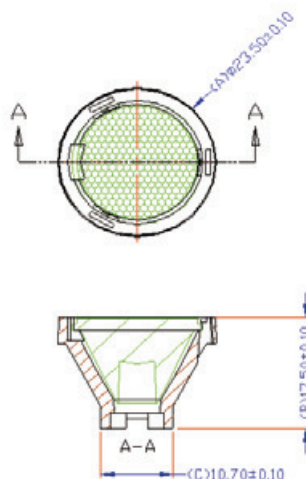

13LNE0AT3801 Specification

For Edixeon Single Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Edixeon Star*1.6mm
- 30*30*1.6mm
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001 (R1)	418	38°	77°

Note: Emitter flux is 115lm @350mA

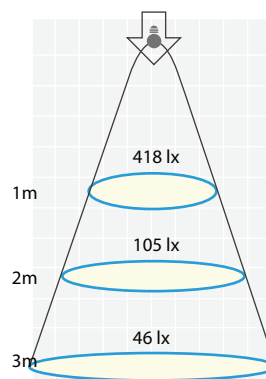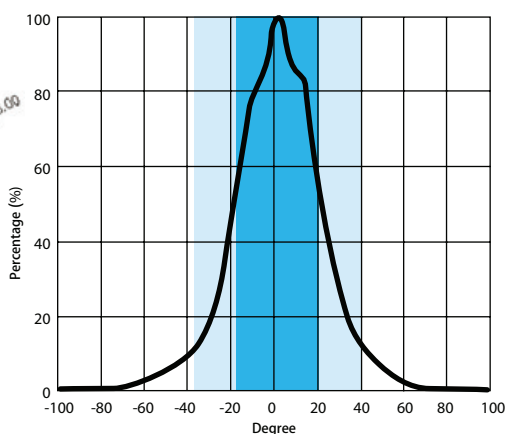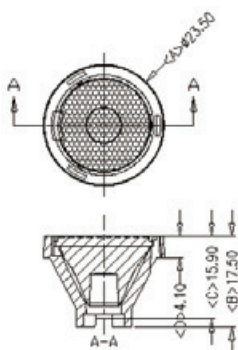

13LNE0AT6001 Specification

For Edixeon Single Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Edixeon Star*1.6mm
- 30*30*1.6mm
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001 (R1)	252	57°	87°

Note: Emitter flux is 115lm @350mA

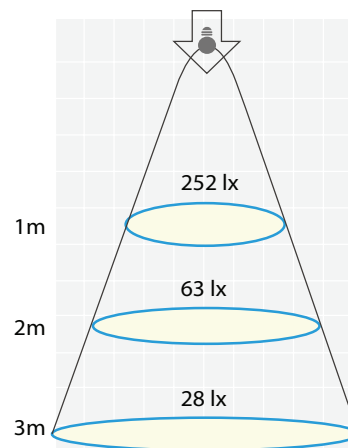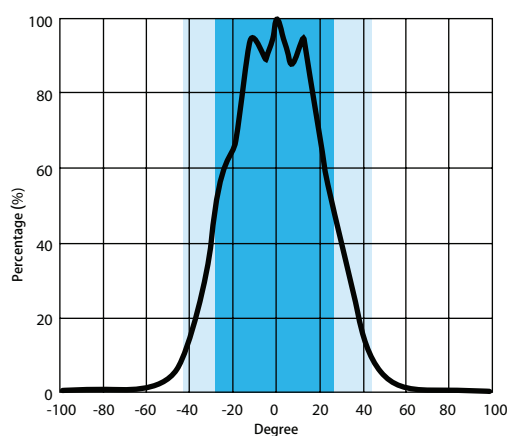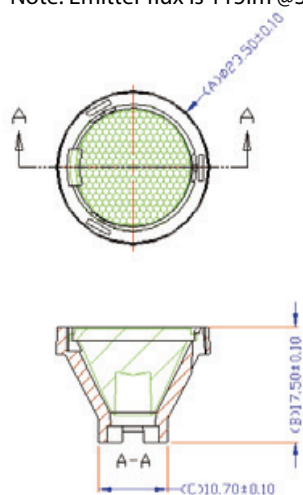

13LNE0AT4001 Specification

For Edixeon Single Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001 (R1)	4200	29°	61°

Note: Emitter ux is 115 lm @350mA

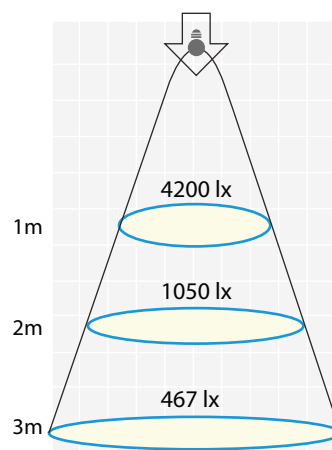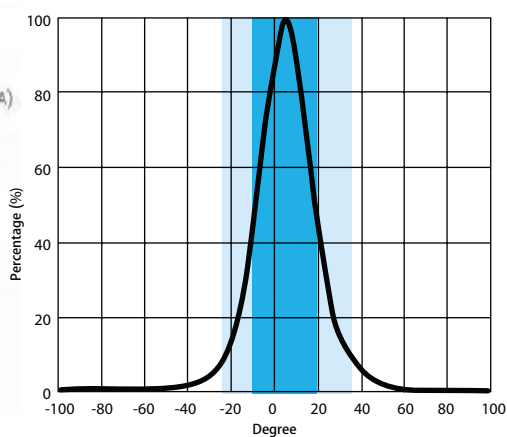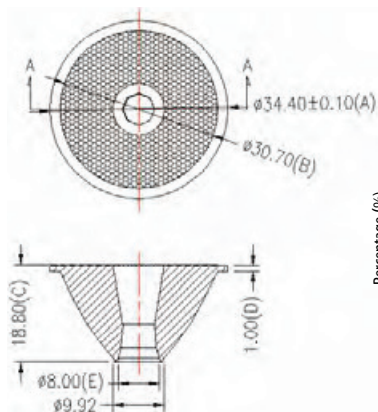

13LNE0AB3501 Specification

For Edixeon Single Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight




Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001 (R1)	5751	33°	68°

Note: Emitter flux is 98lm @350mA

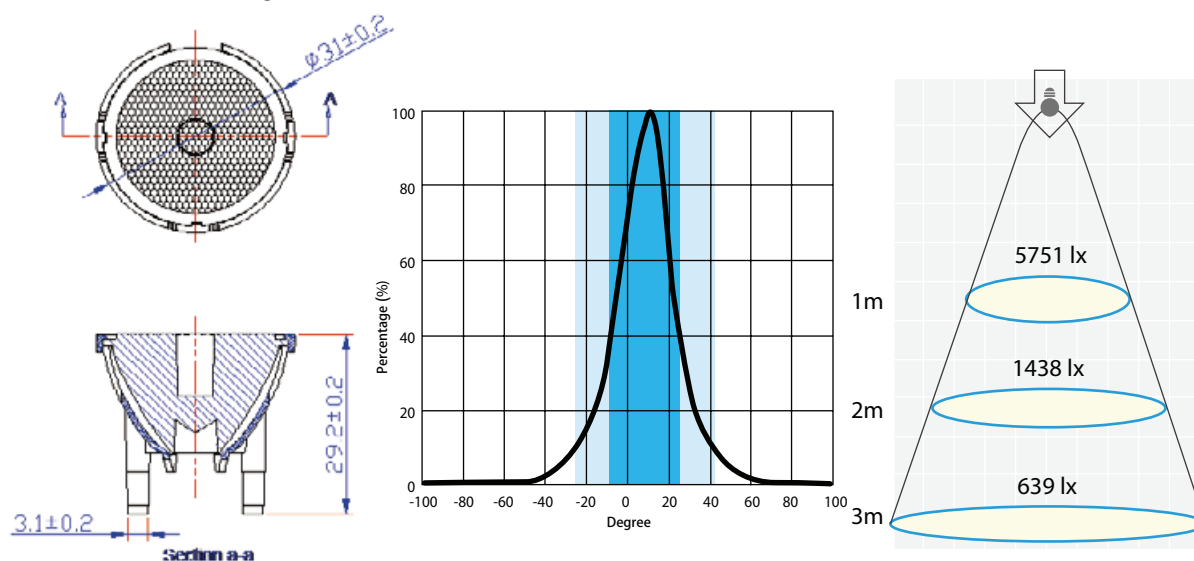

13LNE0AB4501 Specification

For Edixeon Single Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001 (R1)	391	36°	72°

Note: Emitter flux is 98lm @350mA

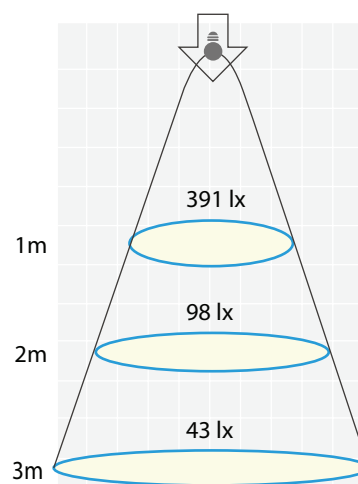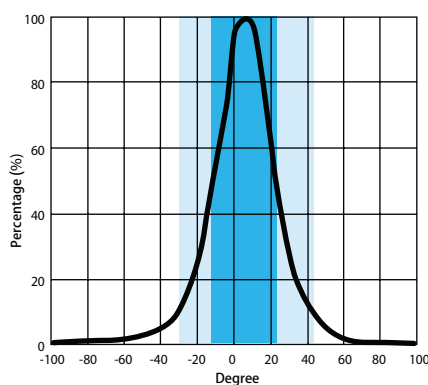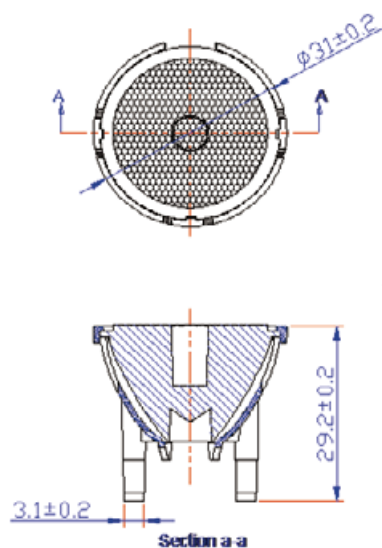

13LNE0AB6001 Specification

For Edixeon Single Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001 (R1)	292	38°	78°

Note: Emitter flux is 98lm @350mA

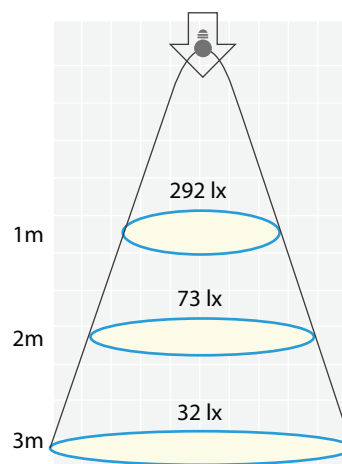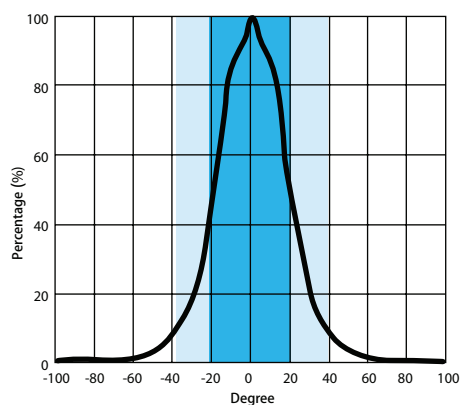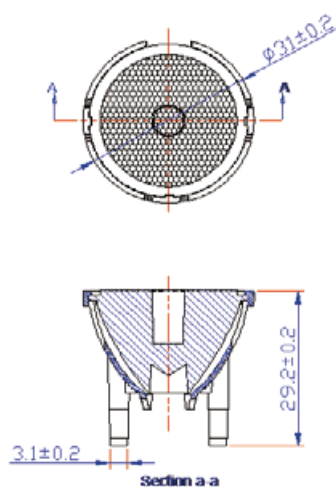

13LNE0AUZ101 Specification

For Edixeon Single Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Edixeon Star*1.6mm
- Applie with Edixeon AIPCB $30 \times 30 \times 1.6\text{mm}$
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001 (R1)	33	70°	97°

Note: Emitter flux is 98lm @350mA

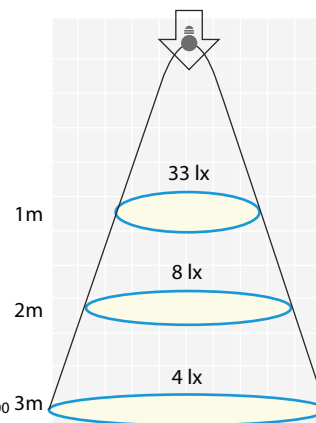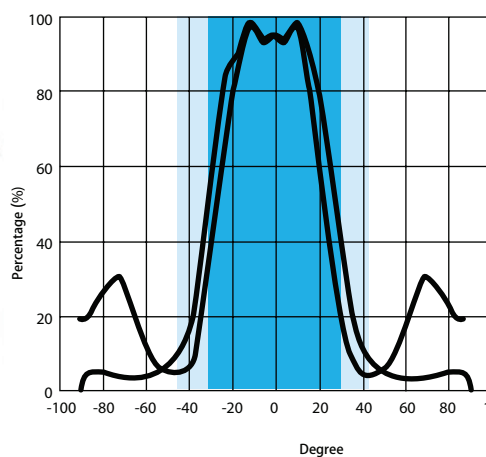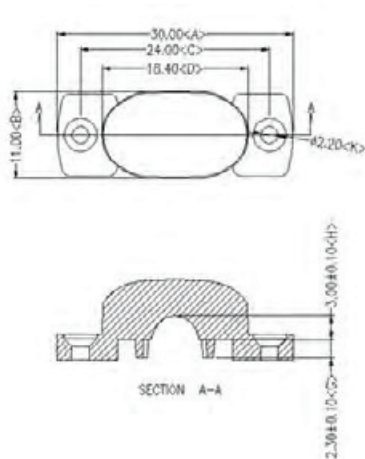

13LNE0AC3001 3in1 Specification

For Edixeon Single Color or RTB 3in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Recommended ALPCB 13ABE0CW0018 for (Single color)
13ABE0CW0018 for (RGB 3 in 1)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001	2530	18°	41°

Note: Emitter flux is 115lm @350mA

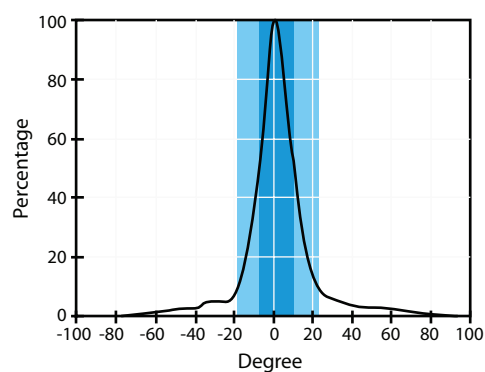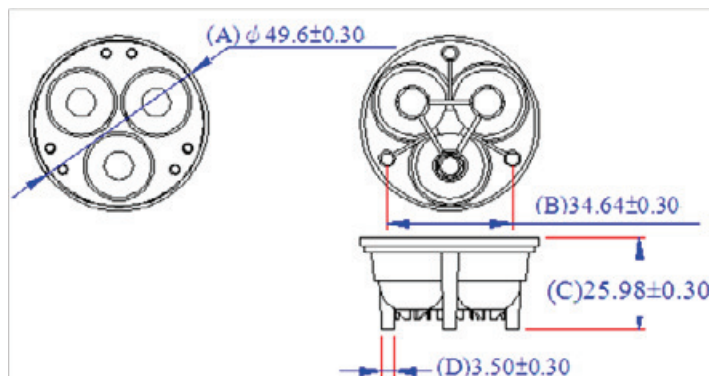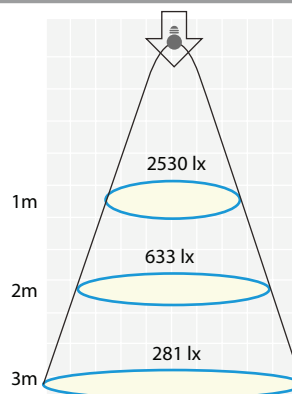

13LNE0AC4501 3in1 Specification

For Edixeon Single Color or RTB 3in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Recommended ALPCB 13ABE0CW0018 for (Single color)
13ABE0CW0018 for (RGB 3 in 1)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001	1400	23°	59°

Note: Emitter flux is 115lm @350mA

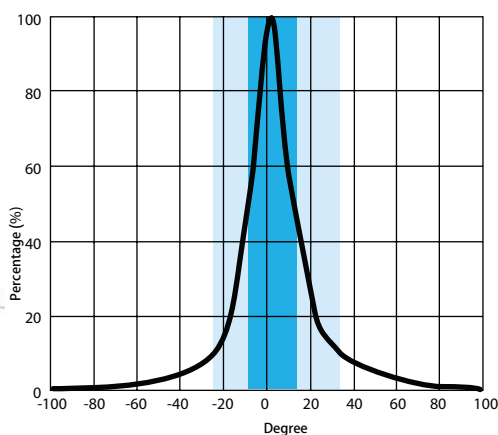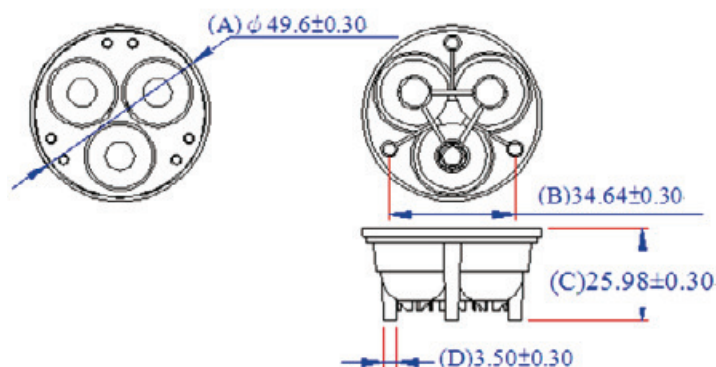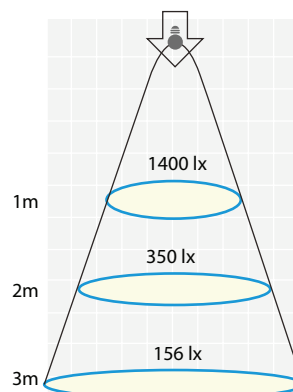

13LNE0AC6001 3in1 Specification

For Edixeon Single Color or RTB 3in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Recommended ALPCB 13ABE0CW0018 for (Single color)
13ABE0CW0018 for (RGB 3 in 1)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001	1336	23°	57°

Note: Emitter flux is 115lm @350mA

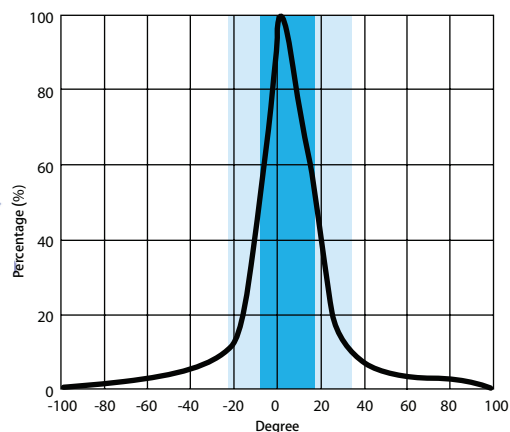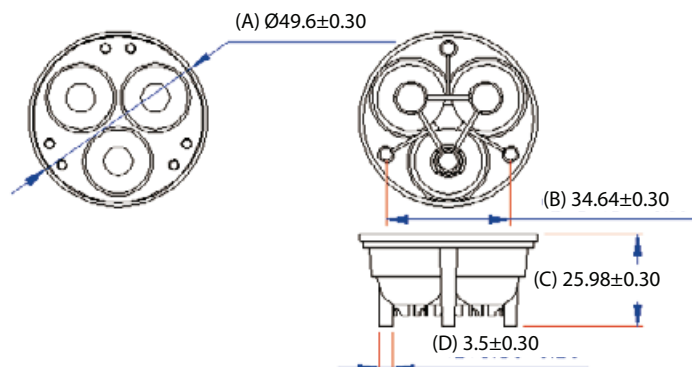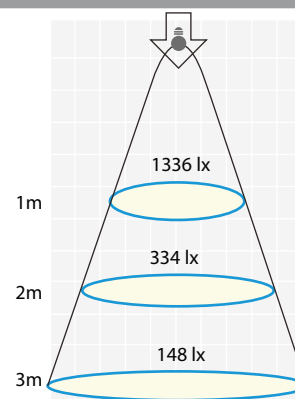

13LNE0AC8001 3in1 Specification

For Edixeon Single Color or RTB 3in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Recommended ALPCB 13ABE0CW0018 for (Single color)
13ABE0CW0018 for (RGB 3 in 1)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001	982	33°	65°

Note: Emitter flux is 115lm @350mA

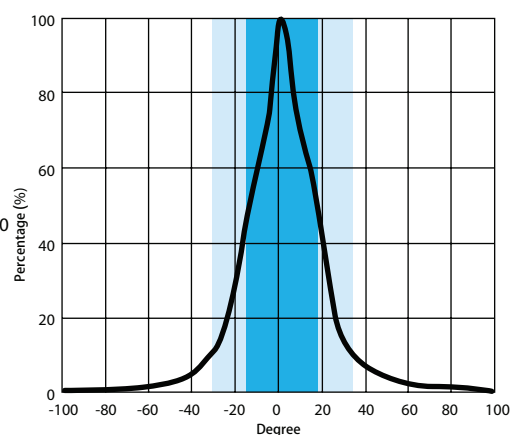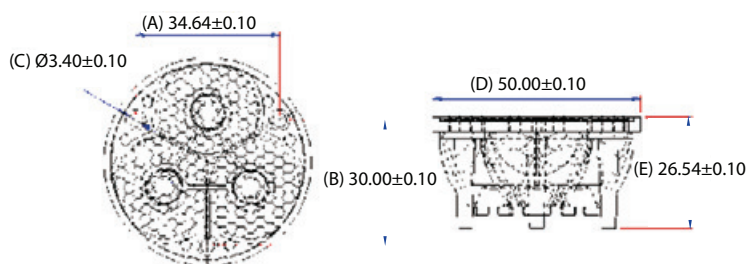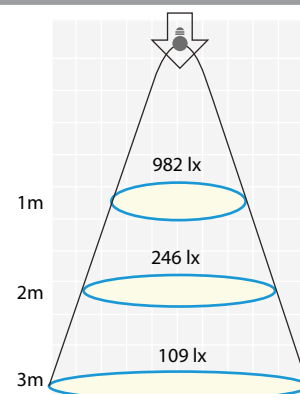

13LNE0AE4501 3in1 Specification

For Edixeon Single Color or RTB 3in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER103M100000002	850	28°	50°

Note: Emitter flux is 110lm @350mA

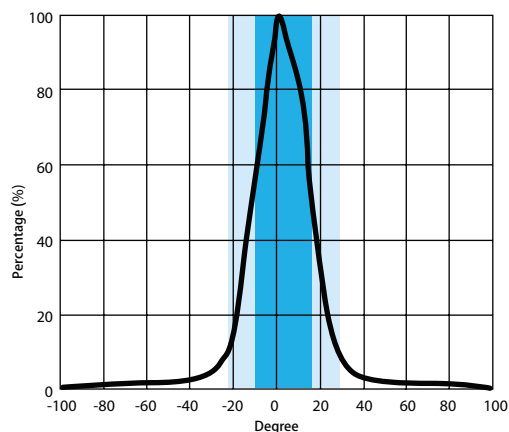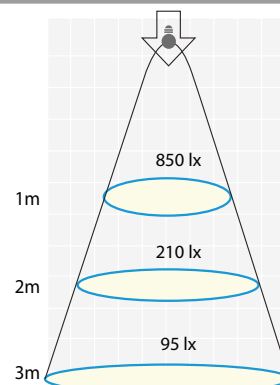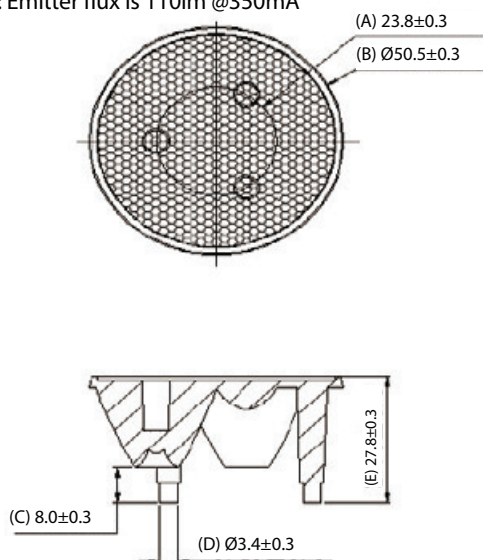

13LNE0AE6001 3in1 Specification

For Edixeon Single Color or RTB 3in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER103M100000002	550	37°	68°

Note: Emitter flux is 110lm @350mA

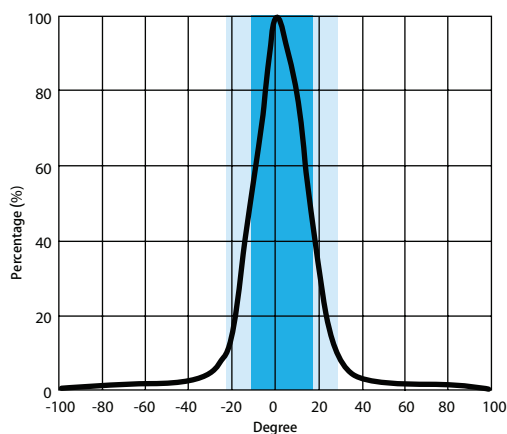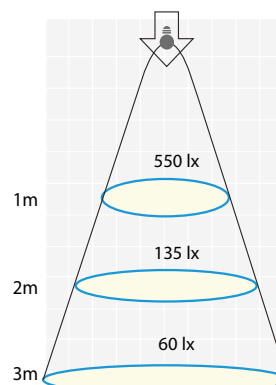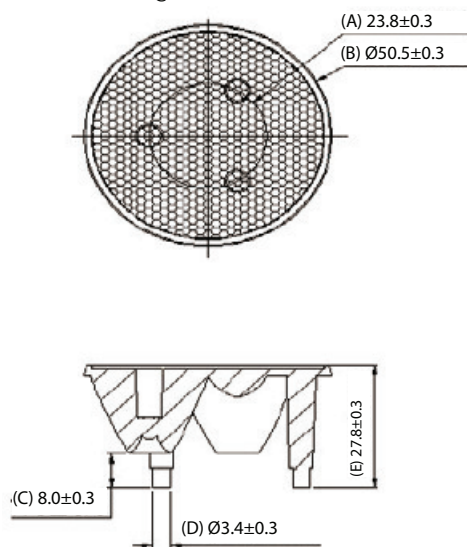

13LNE0AE18xx 6in1 Specification

For Edixeon Single Color or RTB 6in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001	6530	23°	45°

Note: Emitter flux is 115lm @350mA

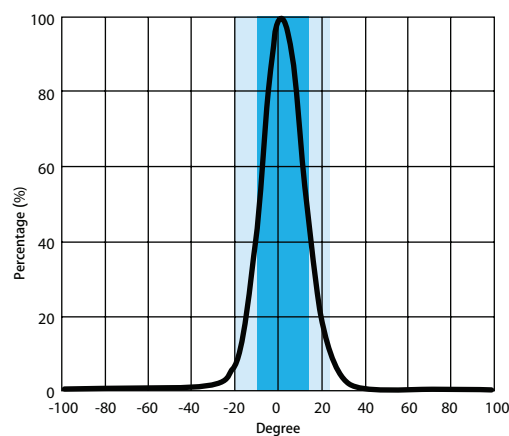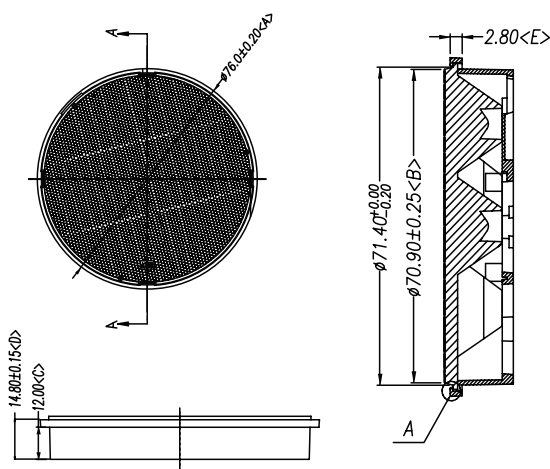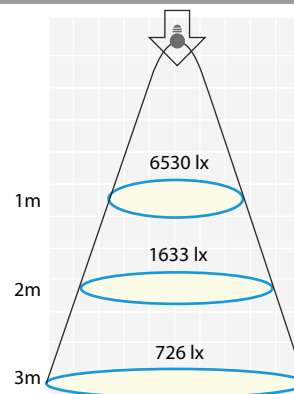

13LNE0AT2004 6in1 Specification

For Edixeon Single Color or RTB 6in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001	4200	26°	61°

Note: Emitter flux is 115lm @350mA

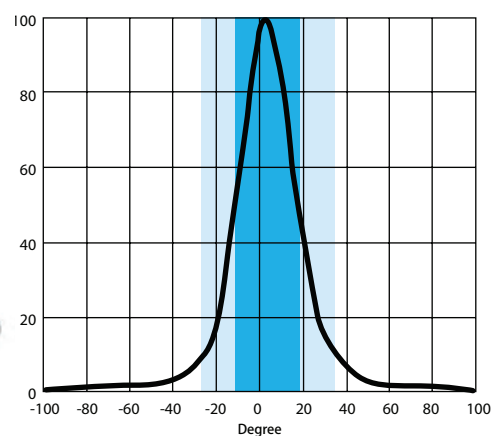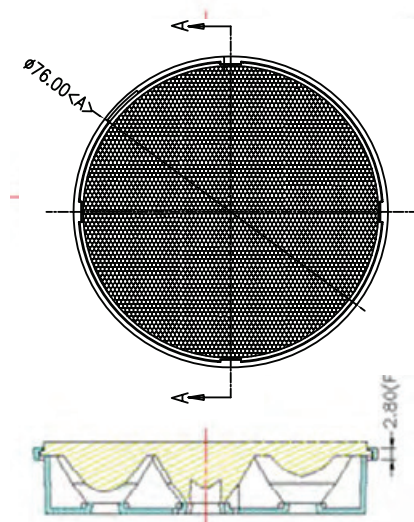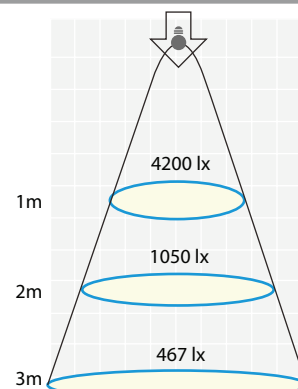

13LNE0DK40xx 6in1 Specification

For Edixeon Single Color or RTB 6in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Stage lighting
- Downlight
- Spotlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001	2880	236°	63°

Note: Emitter flux is 95lm @350mA

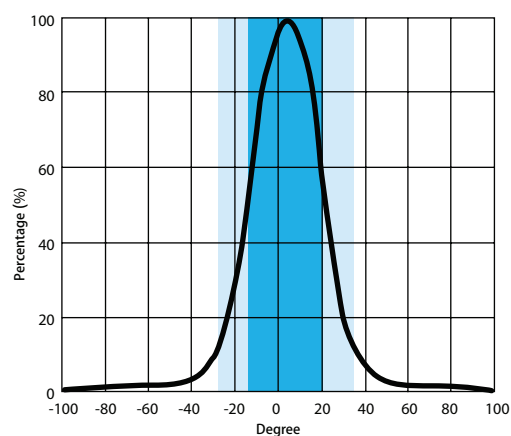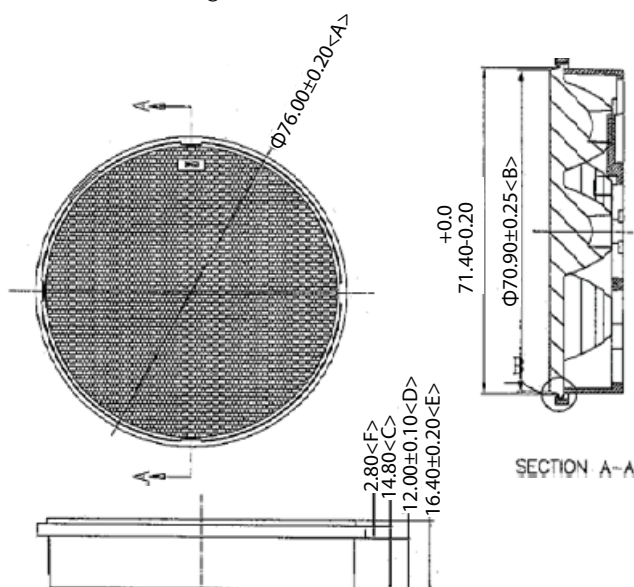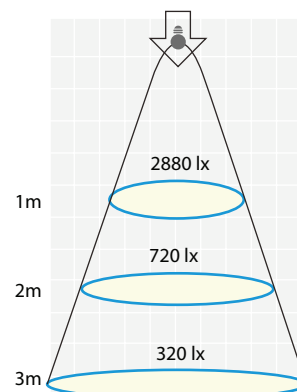

13LNE0COA0xx 6in1 Specification

For Edixeon Single Color or RTB 6in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Stage lighting
- Downlight
- Spot light






Application Note

- Operating temperature -40°C ~ +70°C (Upper limit +80°C)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001	312	104°	154°

Note: Emitter flux is 95lm @350mA

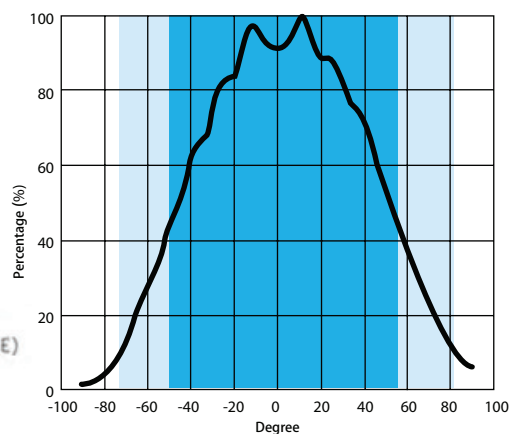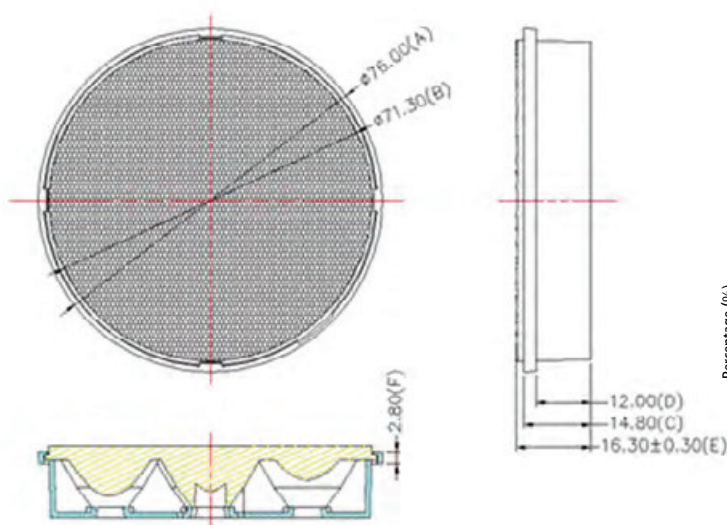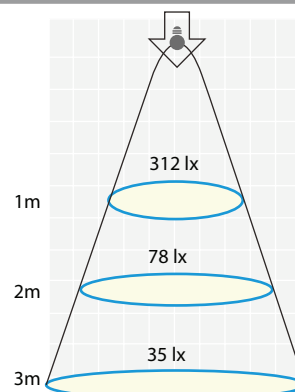

13LNE0AG2501 9in1 Specification

For Edixeon Single Color or RTB 9in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001	5120	26°	54°

Note: Emitter flux is 115lm @350mA

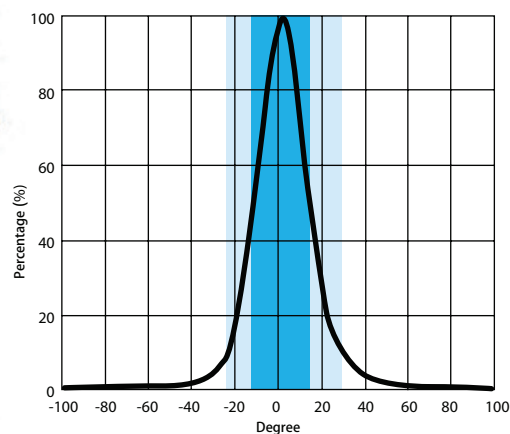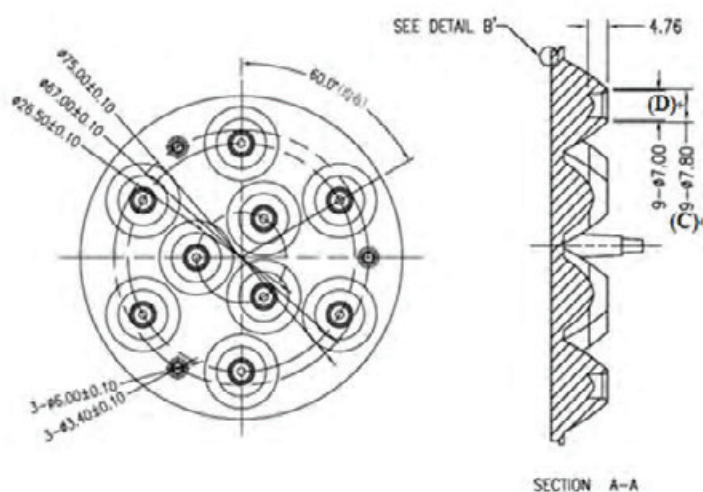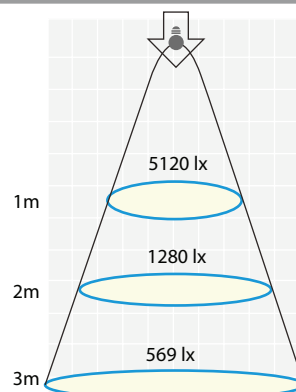

13LNE0BZ25xx 9in1 Specification

For Edixeon Single Color or RTB 9in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001	8140	25°	50°

Note: Emitter flux is 115lm @350mA

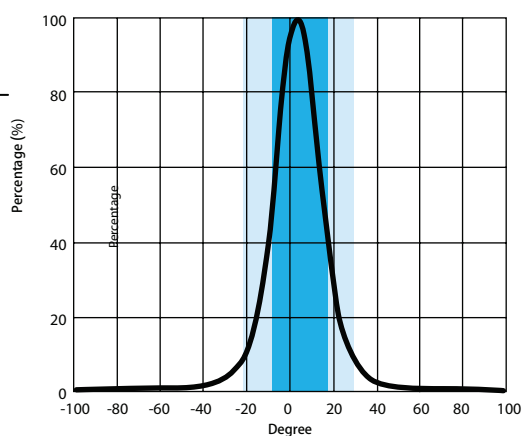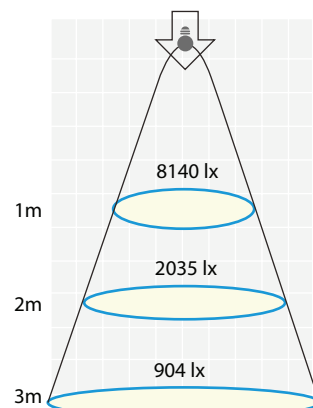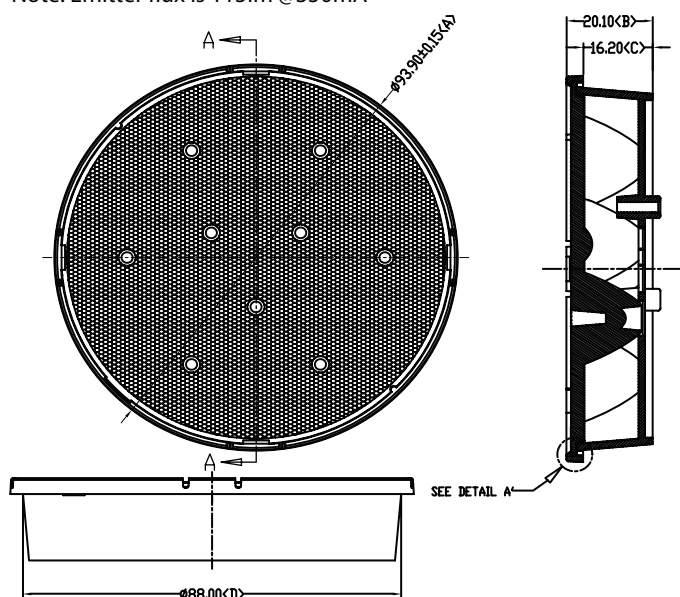

13LNE0BZ5001 9in1 Specification

For Edixeon Single Color or RTB 9in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight





Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001	1688	50°	92°

Note: Emitter flux is 115lm @350mA

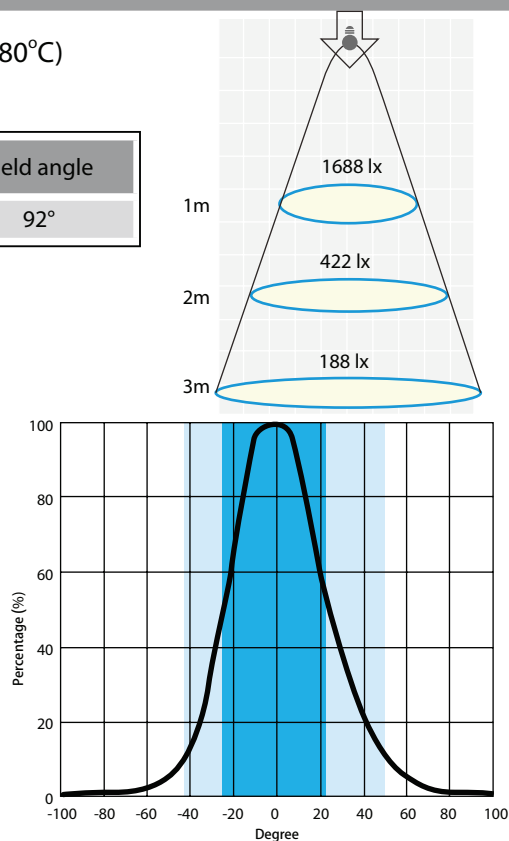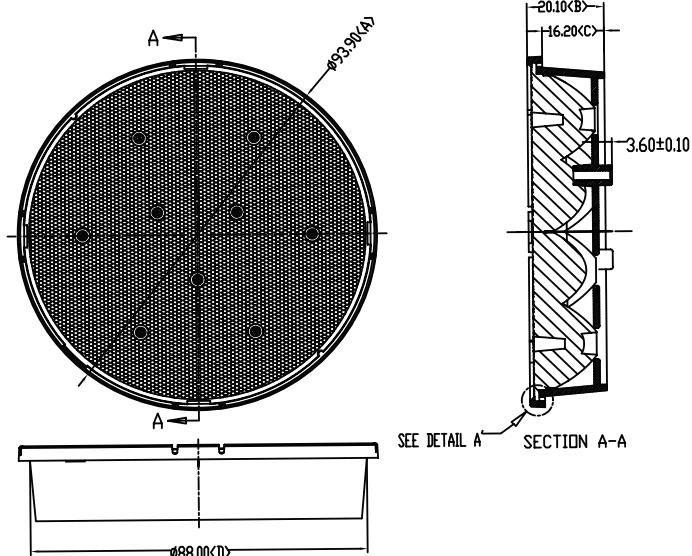

13LNE0AM2501 12in1 Specification

For Edixeon Single Color or RTB 12in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001	14450	22°	49°

Note: Emitter flux is 115lm @350mA

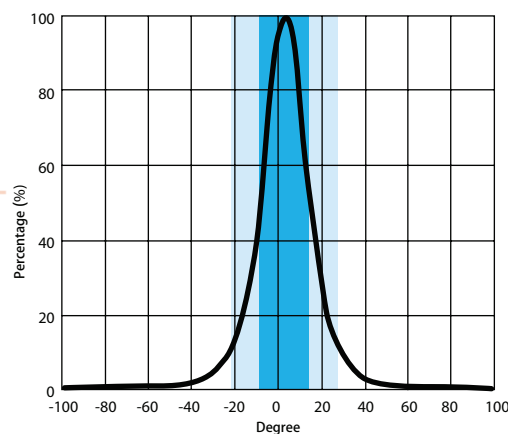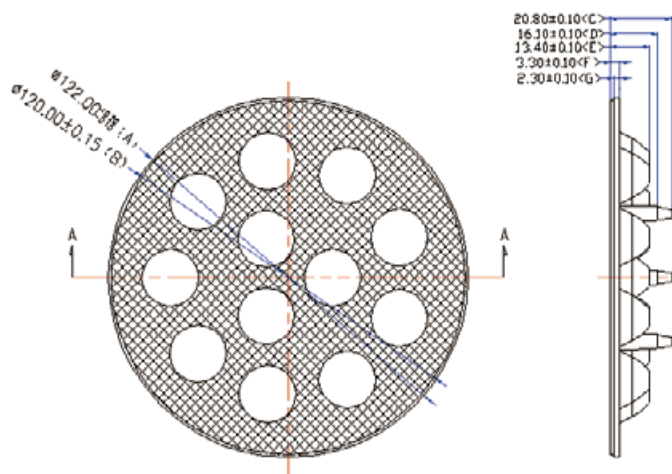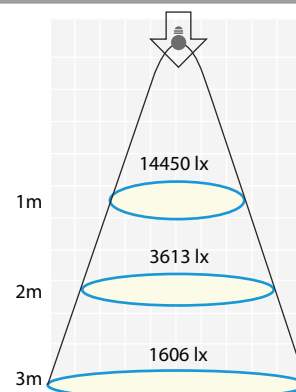

13LNE0AH2501 36in1 Specification

For Edixeon Single Color or RTB 36in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001	4780	23°	45°

Note: Emitter flux is 115lm @350mA

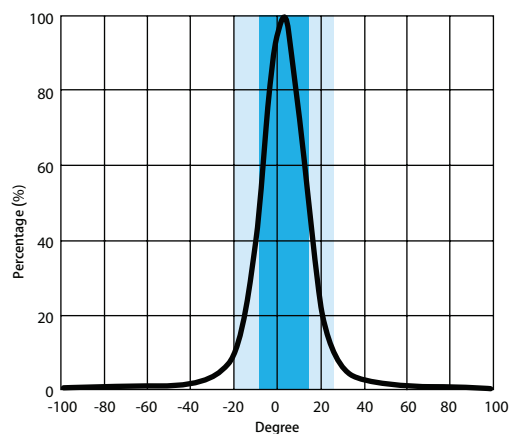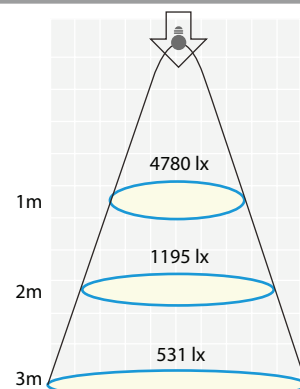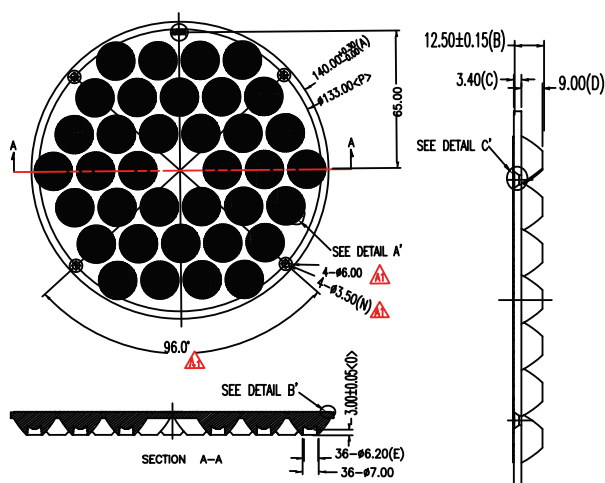

13LNE0AH4501 36in1 Specification

For Edixeon Single Color or RTB 36in1 Emitter

Specification

Features :

- Lens material optical grade PMMA
- Narrow beam angle
- Lens with holder

General Application :

- Spot light
- Downlight






Application Note

- Operating temperature $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (Upper limit $+80^{\circ}\text{C}$)
- Never use any commercial solvents on lenses

Emitter Type	Typical Lux from 1M	Beam angle	Field angle
2ER101CW06000001	6710	26°	52°

Note: Emitter flux is 115m @350mA

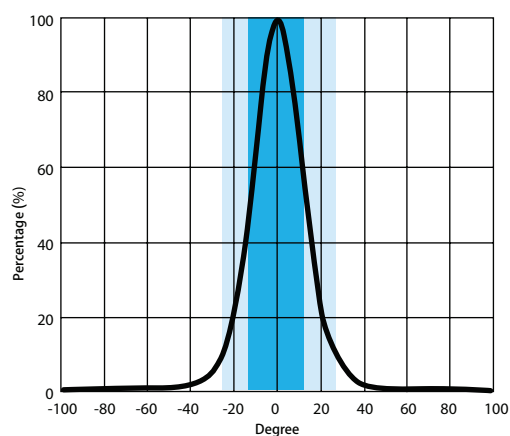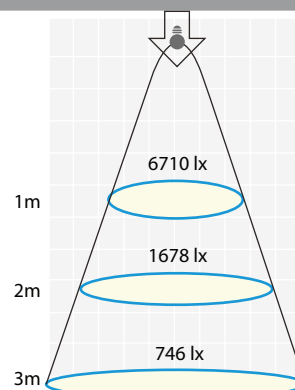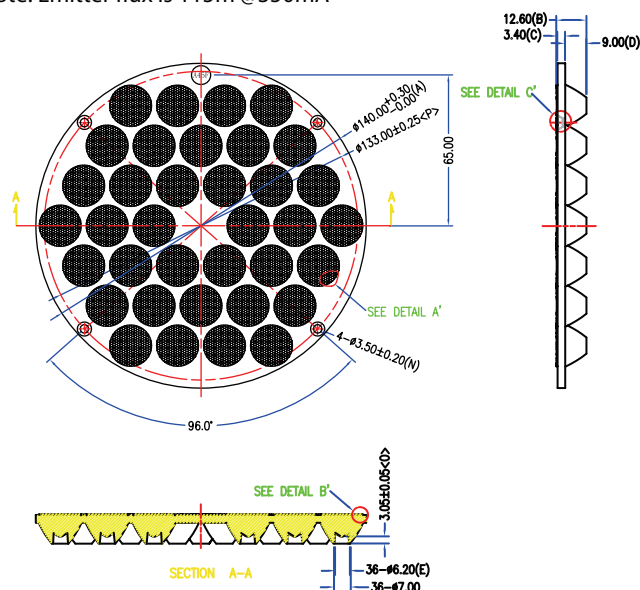


Package Information

The shipping label on the carton specifies the company name, the part number, product quantity, telephone number, fax number and address.

Every tray contains several lens and place into one carton. Please refer to the following table for detailed specification.

Product Name	X pcs/tray	Y trays
13LNE0AA1002	120	17
13LNE0AA15xx	120	10
13LNE0AA25xx	100	10
13LNE0AA38xx	100	10
13LNE0AA45xx	120	10
13LNE0AT2501	100	10
13LNE0AT5001	100	10
13LNE0AT3801	100	8
13LNE0AT6001	100	8
13LNE0AT4001	63	10
13LNE0AB3501	72	10
13LNE0AB4501	72	10
13LNE0AB6001	72	10
13LNE0AUZ101	-	-
13LNE0ACxxxx	25	6
13LNE0AE4501	16	9
13LNE0AE6001	25	6
13LNE0AE18xx	16	9
13LNE0AT2004	16	9
13LNE0DK40xx	16	9
13LNE0COA0xx	16	9
13LNE0AG25xx	9	6
13LNE0BZ25xx	9	7
13LNE0BZ50xx	9	6
13LNE0AM25xx	4	13
13LNE0AH25xx	4	13
13LNE0AH45xx	4	13

Product Name	X pcs/tray	Y trays
13LNE0AE4501	16	9
13LNE0AE6001	25	6
13LNE0AE18xx	16	9
13LNE0AT2004	16	9
13LNE0DK40xx	16	9
13LNE0COA0xx	16	9
13LNE0AG25xx	9	6
13LNE0BZ25xx	9	7
13LNE0BZ50xx	9	6
13LNE0AM25xx	4	13
13LNE0AH25xx	4	13
13LNE0AH45xx	4	13

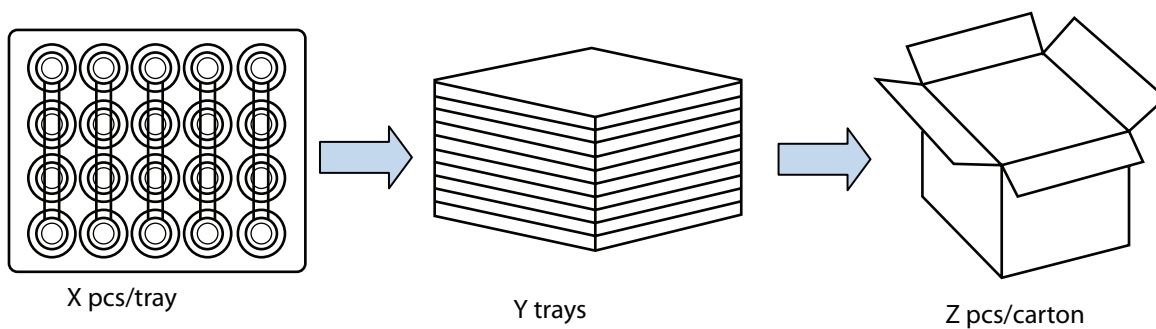

Revision History

Versions	Description	Release Date
1	Establish order code information	2013/03/18
2	Update the year of this version	2013/04/03