

S1WB(A)60

600V 1A


FEATURES

- Small SMT
- High IFSM
- Applicable to Automatic Insertion

APPLICATION

- Switching power supply
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

OUTLINE DIMENSIONS

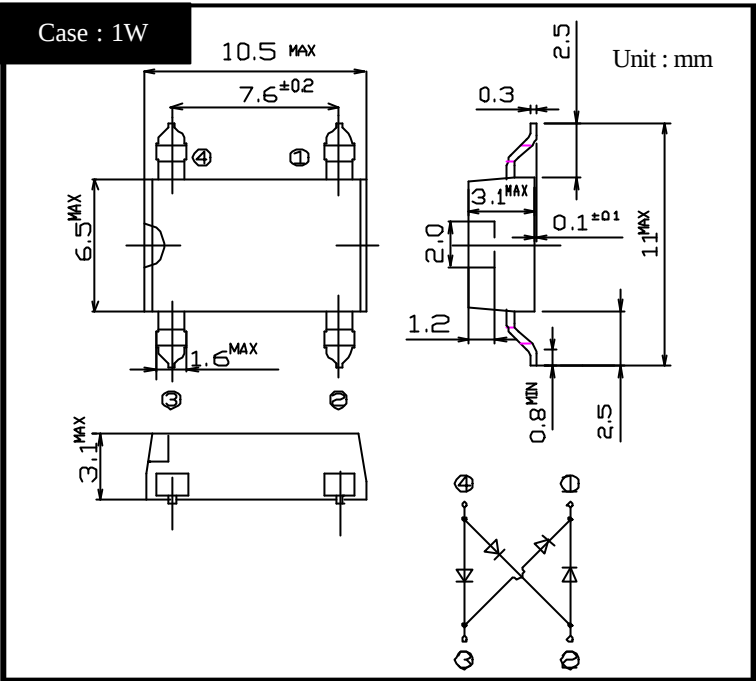

RATINGS

- Absolute Maximum Ratings (If not specified $T_I=25$)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-40 ~ 150	
Operating Junction Temperature	T_j		150	
Maximum Reverse Voltage	V_{RM}		600	V
Average Rectified Forward Current	I_o	50Hz sine wave, R-load, $T_a=25$	1	A
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, $T_j=25$	30	A
Current Squared Time	I^2t	1ms $t < 10ms$ $T_j=25$	4.5	A ² s

- Electrical Characteristics (If not specified $T_I=25$)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=0.5A$, Pulse measurement, Rating of per diode	Max.1.0	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement, Rating of per diode	Max.10	μA
Thermal Resistance	θ_{jl}	junction to lead	Max.10	/W
	θ_{ja}	junction to ambient	Max.65	

S1WB(A)x

Forward Voltage

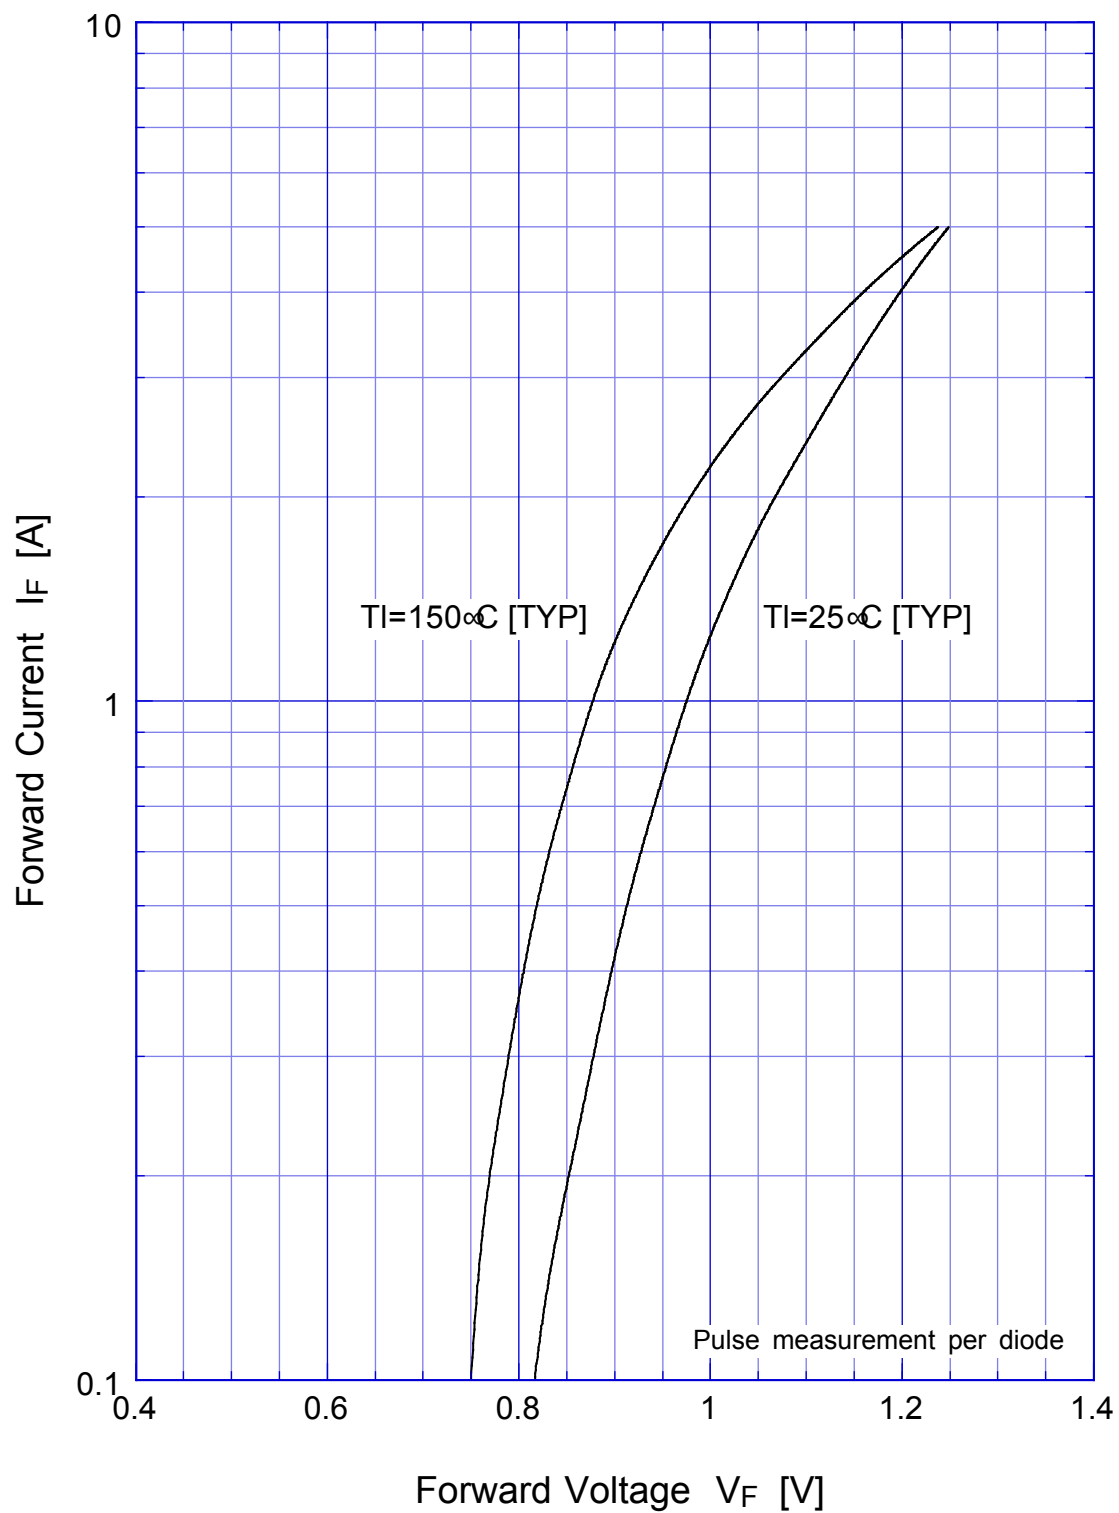


S1WB(A)x Forward Power Dissipation

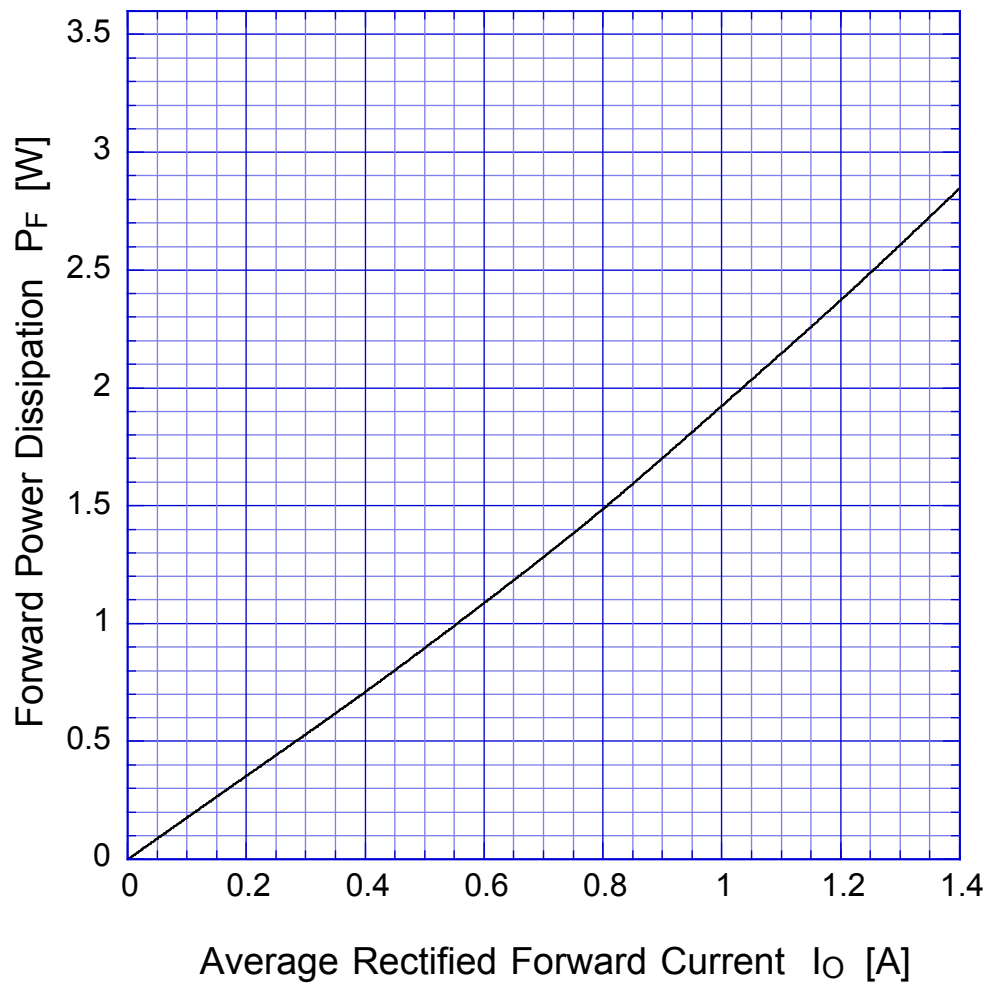

$T_j = 150^{\circ}\text{C}$
Sine wave

S1WB(A)x


Derating Curve

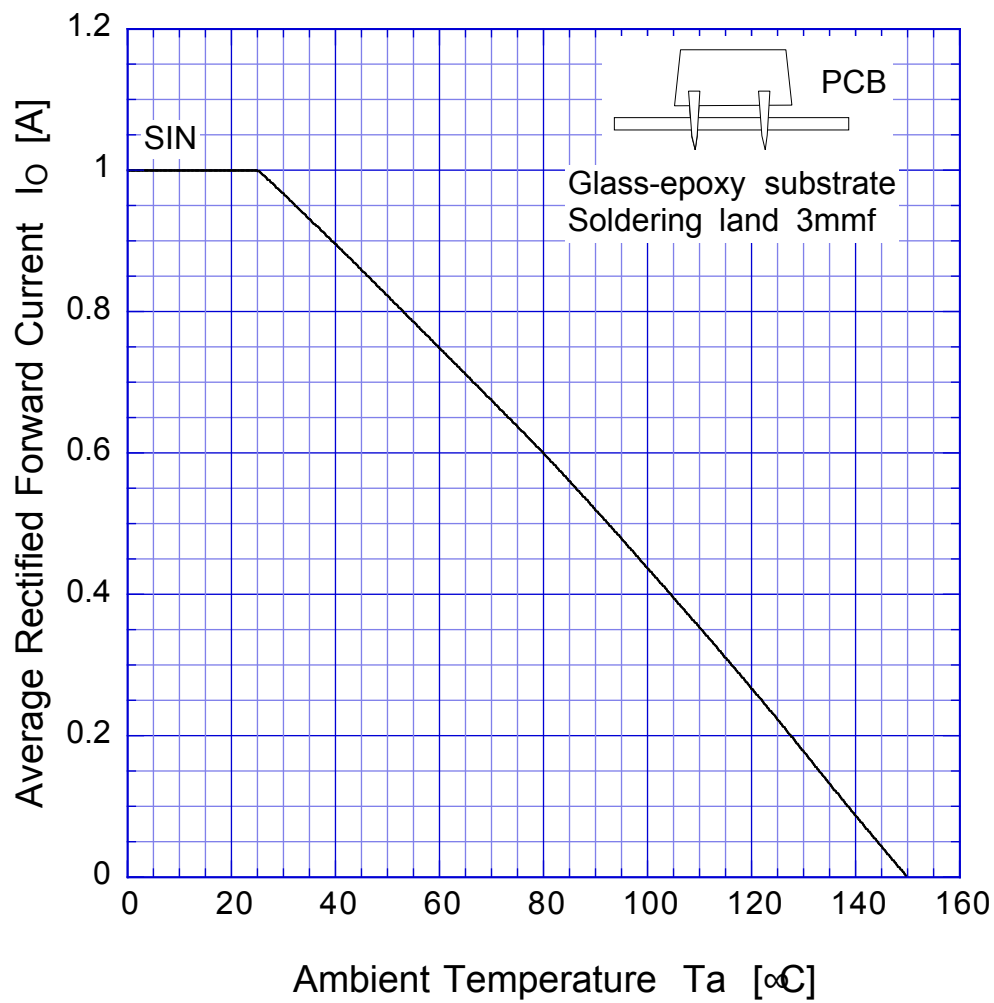

Sine wave
R-load
Free in air

S1WB(A)x

Peak Surge Forward Capability

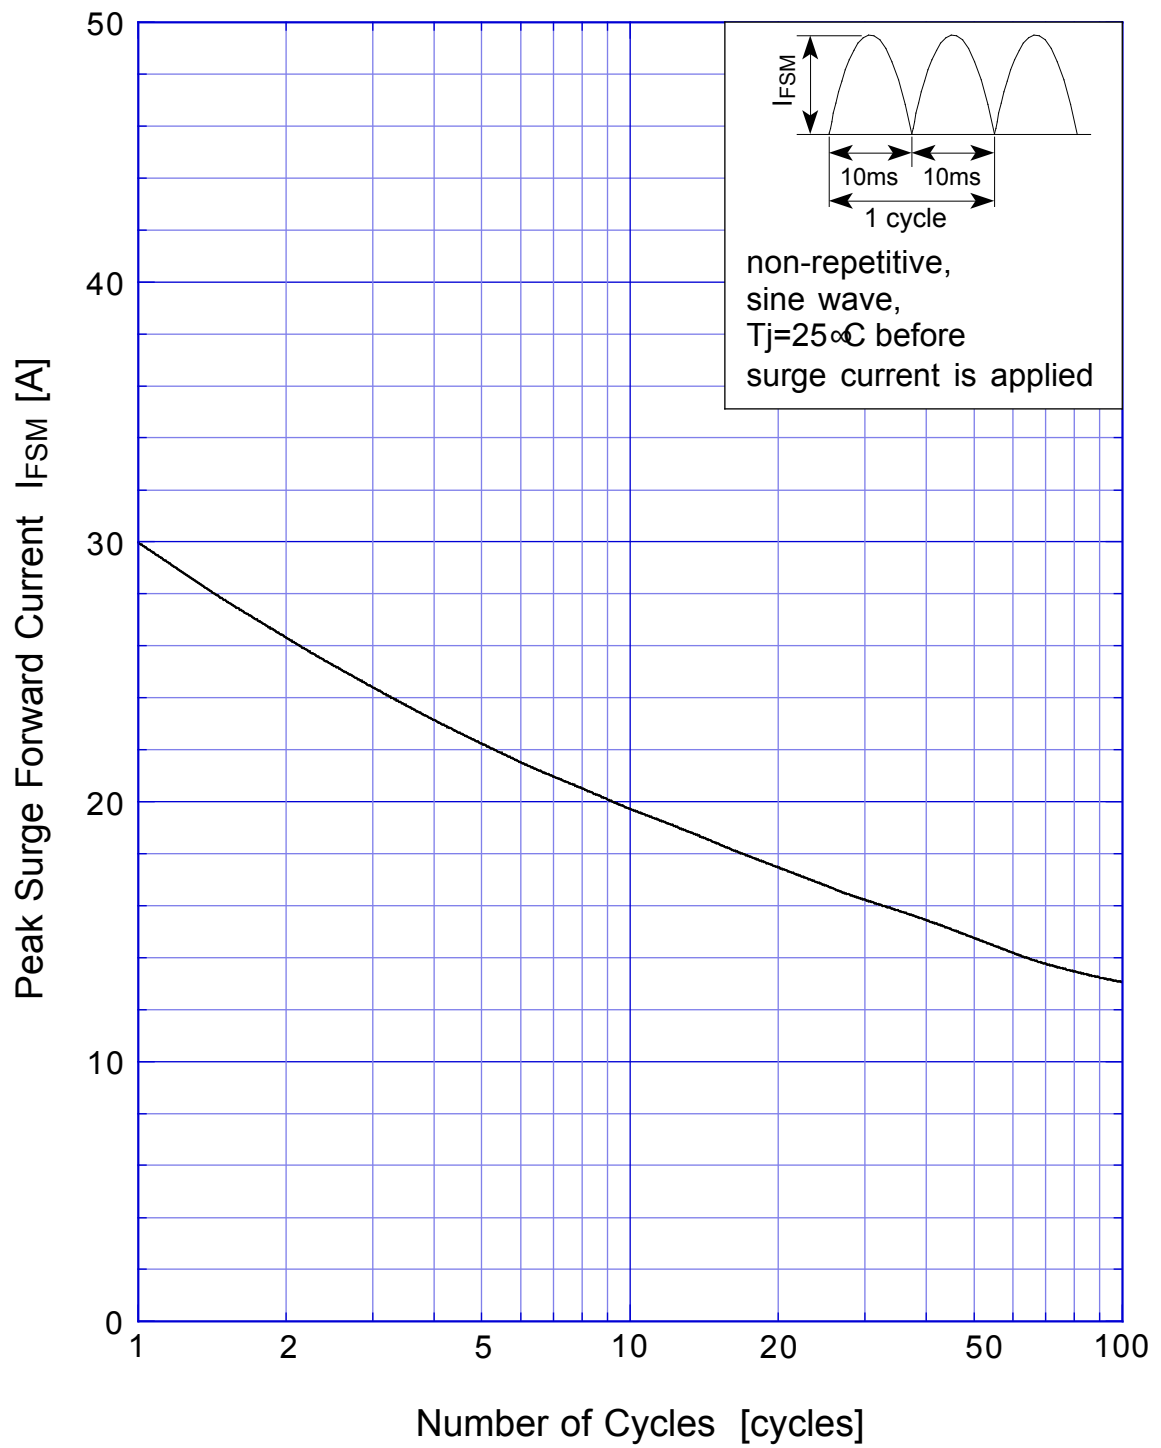

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.