

LV HRC fuse element, NH3, In: 630 A, gG, Un AC: 500 V, Un DC: 440 V, Front indicator, live grip lugs



Model	
Product brand name	SETRON
Product designation	LV HRC fuse link
Design of the product	With blade contacts
Design of an identification indicator	Front indicators
Design of the switching contact	Non-corroding, silver-plated
Design of the fuse link	LV HRC fuse link
General technical data	
Size of fuse system / acc. to DIN EN 60269-1	NH3
Operating class of the fuse link	gG
circuit-breaker / Design	3NA3
Supply voltage	
• at AC / rated value	500 V
• at DC	440 V
Protection class	
Protection class IP	IP20, with connected conductors
Switching capacity	
Switching capacity current	

- at DC / acc. to IEC 60947-2 / rated value 25 kA
- acc. to IEC 60947-2 / rated value 120 kA

Dissipation

Power loss [W]	44.8 W
Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	44.8 W

Electricity

Tripping residual / rated value / derated current / at 40 Cel	598.5 A
Current / at AC / rated value	630 A
Diken-export / Let-through energy	DE_3NA_3_500_gG_630

Mechanical Design

Width	
• of the enclosure	71.2 mm
Mounting position	Any, preferably vertical
Net weight	939 g

Environmental conditions

Ambient temperature	
• minimum	-5 °C
• maximum	40 °C
• during storage	Air humidity 90% at 20 °C
Environmental category	-20 to +50 at 95% relative humidity

Certificates

Reference code	
• acc. to DIN EN 61346-2	F
• acc. to DIN EN 81346-2	F

General Product Approval

Declaration of Conformity

Test Certificates



CCC



KEMA



VDE



EG-Konf.

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

Test Certificates

Shipping Approval

other

[Miscellaneous](#)



GL

[Environmental Conformations](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NA3372>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NA3372>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3372

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

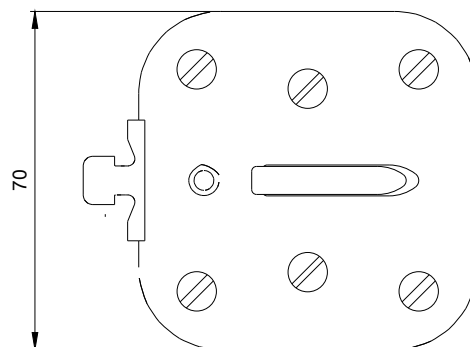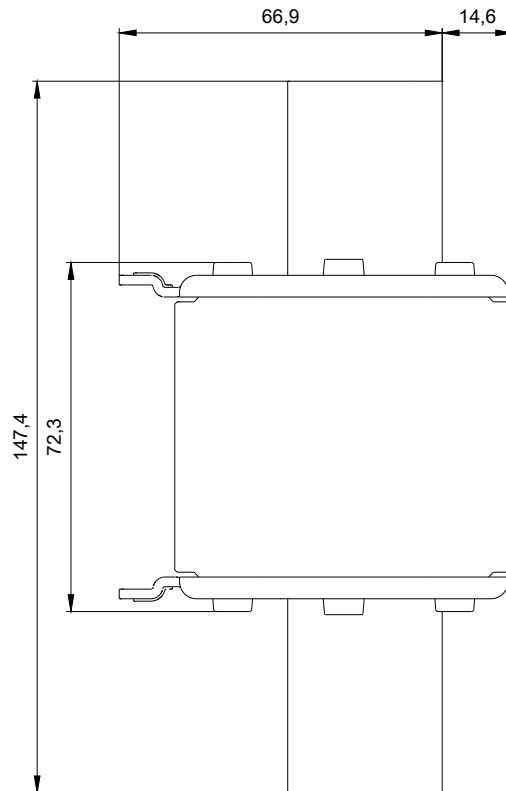

1

-F1



2

