



CONTACTOR, AC-3 3 KW/400 V, 1 NC, DC 110 V, 3-POLE, SIZE S00, SCREW CONNECTION

Figure similar

product brand name	SIRIUS
Product designation	power contactor

General technical data:

Degree of pollution	3
Mechanical service life (switching cycles)	
• of the contactor typical	30 000 000
• of the contactor with added electronics-compatible auxiliary switch block typical	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
Protection class IP	
• on the front	IP20
• of the terminal	IP20
Equipment marking	
• acc. to DIN EN 61346-2	Q
• acc. to DIN EN 81346-2	Q

Main circuit:

Number of poles for main current circuit	3
Number of NC contacts for main contacts	0
Number of NO contacts for main contacts	3
Operating current	
• at AC-1	
— at 400 V at ambient temperature 40 °C	18 A
Rated value	

— up to 690 V at ambient temperature 40 °C Rated value	18 A
— up to 690 V at ambient temperature 60 °C Rated value	16 A
• at AC-3 — at 400 V Rated value	7 A
• at AC-4 at 400 V Rated value	6.5 A
Operating current with 1 current path	
• at DC-1 — at 24 V Rated value	15 A
— at 110 V Rated value	1.5 A
• at DC-3 at DC-5 — at 24 V Rated value	15 A
— at 110 V Rated value	0.1 A
Operating current with 2 current paths in series	
• at DC-1 — at 24 V Rated value	15 A
— at 110 V Rated value	8.4 A
• at DC-3 at DC-5 — at 110 V Rated value	0.25 A
— at 24 V Rated value	15 A
Operating current with 3 current paths in series	
• at DC-1 — at 24 V Rated value	15 A
— at 110 V Rated value	15 A
• at DC-3 at DC-5 — at 110 V Rated value	15 A
— at 24 V Rated value	15 A
Active power loss at AC-3 at 400 V for rated value of the operating current per conductor	0.42 W
Control circuit/ Control:	
Type of voltage of the control supply voltage	DC
Control supply voltage for DC	
• Rated value	110 V
Operating range factor control supply voltage rated value of the magnet coil for DC	0.85 ... 1.1
Closing power of the magnet coil for DC	3.3 W
Holding power of the magnet coil for DC	3.3 W
Auxiliary circuit:	
Number of NC contacts	
• for auxiliary contacts — instantaneous contact	1

Number of NO contacts	
• for auxiliary contacts — instantaneous contact	0
Operating current at AC-15	
• at 230 V Rated value • at 400 V Rated value	6 A 3 A
Contact reliability of the auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)

Short-circuit:

Design of the fuse link	
• for short-circuit protection of the main circuit — with type of assignment 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	fuse gL/gG: 35 A fuse gL/gG: 20 A fuse gL/gG: 10 A

Installation/ mounting/ dimensions:

Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
• Side-by-side mounting	Yes
Height	57.5 mm
Width	45 mm
Depth	72 mm
Required spacing	
• for grounded parts — at the side	6 mm

Connections/ Terminals:

Type of electrical connection	
• for main current circuit • for auxiliary and control current circuit	screw-type terminals screw-type terminals
Type of connectable conductor cross-section	
• for main contacts — solid — single or multi-stranded — finely stranded with core end processing • for AWG conductors for main contacts • for auxiliary contacts — solid — finely stranded with core end processing • for AWG conductors for auxiliary contacts	2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), max. 2x (0.75 ... 4 mm ²) 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), max. 2x (0.75 ... 4 mm ²) 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) 2x (20 ... 16), 2x (18 ... 14), 1x 12 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), max. 2x (0.75 ... 4 mm ²) 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) 2x (20 ... 16), 2x (18 ... 14), 1x 12

Mechanical data:

Size of contactor	S00
--------------------------	-----

Ambient conditions:

Installation altitude at height above sea level maximum	2 000 m
Ambient temperature during operation	-25 ... +60 °C

Certificates/ approvals:

General Product Approval	Functional Safety/Safety of Machinery
--------------------------	---------------------------------------



CCC



CSA



UL



UR



[Type Examination](#)

Declaration of Conformity	Test Certificates	Shipping Approval
---------------------------	-------------------	-------------------



EG-Konf.

[Special Test Certificate](#)



ABS



DNV



GL



LRS

Shipping Approval	other
-------------------	-------



PRS



RINA



RMRS

[Environmental Confirmations](#)

[Confirmation](#)

[other](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT10151BF42>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT10151BF42>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT10151BF42&lang=en

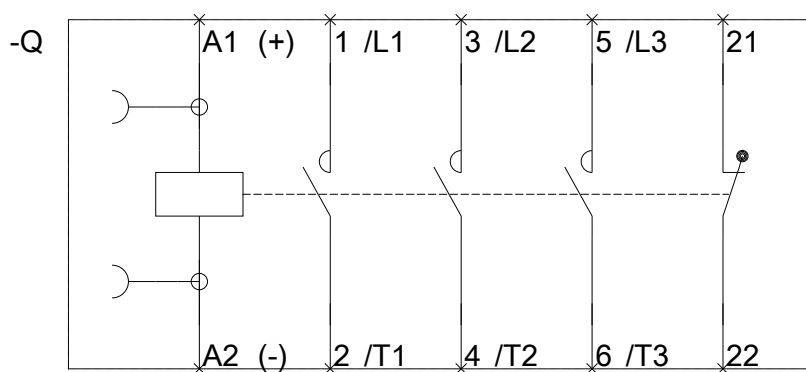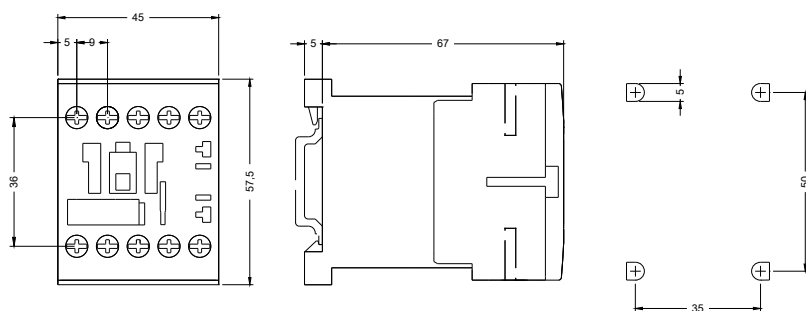

last modified:

14.05.2015