



## NPN SILICON PLANAR EPITAXIAL TRANSISTOR

CMBTH10

SOT-23  
Formed SMD Package



PIN CONFIGURATION (NPN)



Marking Code = 3E

VHF/UHF Transistor

### ABSOLUTE MAXIMUM RATINGS

DESCRIPTION	SYMBOL	VALUE	UNITS
Collector Emitter Voltage	$V_{CEO}$	25	V
Collector Base Voltage	$V_{CBO}$	30	V
Emitter Base Voltage	$V_{EBO}$	3.0	V

### THERMAL CHARACTERISTICS

*Device Dissipation FR-5 Board, $T_a=25^\circ\text{C}$ Derate above $=25^\circ\text{C}$	$P_D$	225 1.8	mW mW/ $^\circ\text{C}$
Thermal Resistance Junction to Ambient in free Air	$R_{th(j-a)}$	556	$^\circ\text{C}/\text{mW}$
**Device Dissipation Alumina Substrate, $T_a=25^\circ\text{C}$ Derate above $=25^\circ\text{C}$	$P_D$	300 2.4	mW mW/ $^\circ\text{C}$
Thermal Resistance Junction to Ambient in free Air	$R_{th(j-a)}$	417	$^\circ\text{C}/\text{mW}$
Junction and Storage Temperature	$T_j, T_{stg}$	150	$^\circ\text{C}$

\* FR-5 Board=25.4 x 19.05 x 1.58 mm (1.0 x 0.75 x 0.062 inches)

\*\* Alumina Substrate=10.16 x 7.62 x 0.61 mm (0.4 x 0.3 x 0.024 inches) 99.5% alumina.


### Electrical Characteristics ( $T_a=25^\circ\text{C}$ unless specified otherwise)

DESCRIPTION	SYMBOL	CONDITIONS	MIN	MAX	UNIT
Collector Emitter Voltage	$V_{CEO}$	$I_C=1\text{mA}, I_B=0$	25		V
Collector Base Voltage	$V_{CBO}$	$I_C=100\mu\text{A}, I_E=0$	30		V
Emitter Base Voltage	$V_{EBO}$	$I_E=10\mu\text{A}, I_C=0$	3		V
Collector Cut Off Current	$I_{CBO}$	$V_{CB}=25\text{V}, I_E=0$		100	nA
Emitter Cut Off Current	$I_{EBO}$	$V_{EB}=2\text{V}, I_C=0$		100	nA
DC Current Gain	$h_{FE}$	$V_{CE}=10\text{V}, I_C=4\text{mA}$	60		
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=4\text{mA}, I_B=0.4\text{mA}$		0.50	V
Base Emitter On Voltage	$V_{BE(on)}$	$V_{CE}=10\text{V}, I_C=4\text{mA}$		0.95	V


NPN SILICON PLANAR EPITAXIAL TRANSISTOR

CMBTH10

SOT-23  
Formed SMD Package



PIN CONFIGURATION (NPN)  
1 = BASE  
2 = EMITTER  
3 = COLLECTOR




Electrical Characterstics (T<sub>a</sub>=25°C unless specified otherwise)

DYNAMIC CHARACTERISTICS

DESCRIPTION	SYMBOL	CONDITIONS	MIN	MAX	UNIT
Current Gain - Bandwidth Product	f <sub>T</sub>	V <sub>CE</sub> =10V, I <sub>C</sub> =4mA, f=100MHz	650		MHz
Collector Base Capacitance	C <sub>cb</sub>	V <sub>CB</sub> =10V, I <sub>E</sub> =0, f=1MHz		0.70	pF
Common Base Feedback Capacitance	C <sub>rb</sub>	V <sub>CB</sub> =10V, I <sub>E</sub> =0, f=1MHz		0.65	pF
Collector Base Time Constant	rb' C <sub>c</sub>	V <sub>CB</sub> =10V, I <sub>C</sub> =4mA, f=31.8MHz		9.0	ps


## SOT-23 Package Reel Information

### Reel Specifications for W Packing (13") and 7'

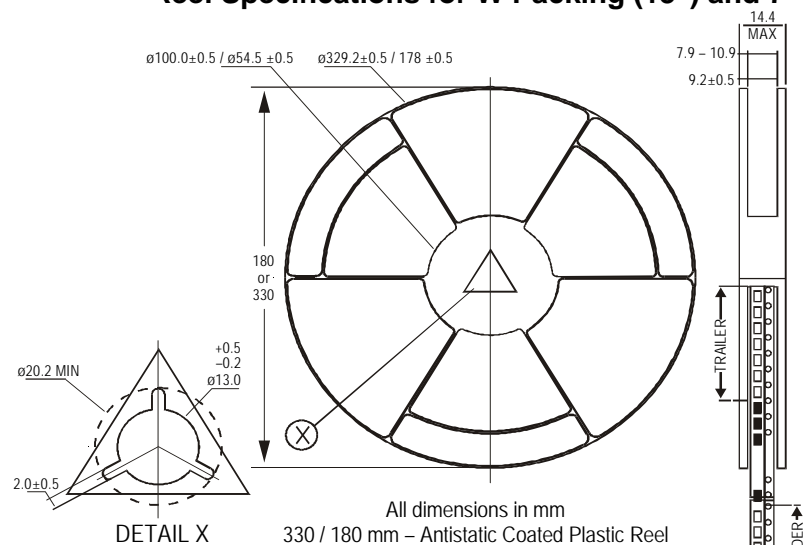

	<b>8mm Tape Size of Reel</b>	<b>8mm Tape Size of Reel</b>
	330 mm (13")	180 mm (7")
No. of Devices	10,000 Pcs	3,000 Pcs

- ## Tape Specification for SOT-23 Surface Mount Device

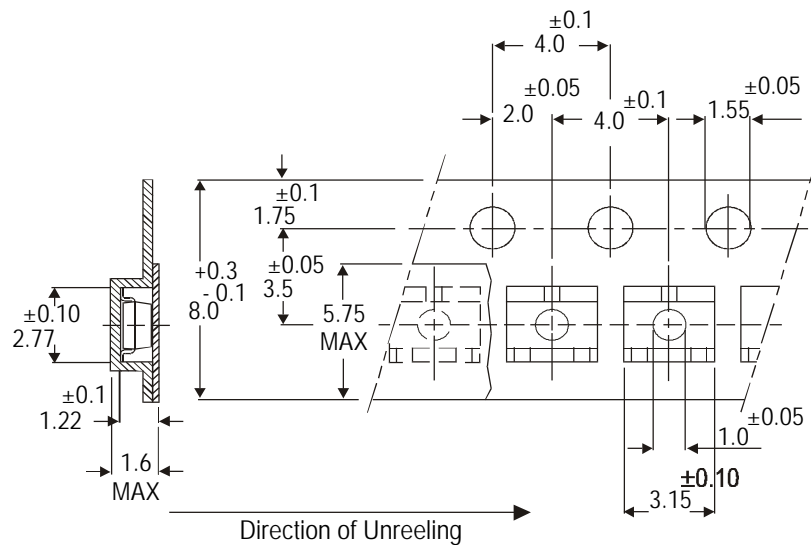

## Packing Detail

PACKAGE	STANDARD PACK		INNER CARTON BOX		OUTER CARTON BOX		
	Details	Net Weight/Qty	Size	Qty	Size	Qty	Gr Wt
SOT-23 T&R	3K/reel	136 gm/3K pcs	3" x 7.5" x 7.5"	12 K	17" x 15" x 13.5"	192 K	12 kgs
			9" x 9" x 9"	51 K	19" x 19" x 19"	408 K	28 kgs
	10K/reel	415 gm/10K pcs	13" x 13" x 0.5"	10 K	17" x 15" x 13.5"	300 K	16 kgs

### Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Discrete Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of  
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.  
Telephone + 91-11-2579 6150, 5141 1112 Fax + 91-11-2579 5290, 5141 1119  
email@cdil.com www.cdilsemi.com