




Quectel LC86L

Compact GNSS Module Integrating Patch Antenna

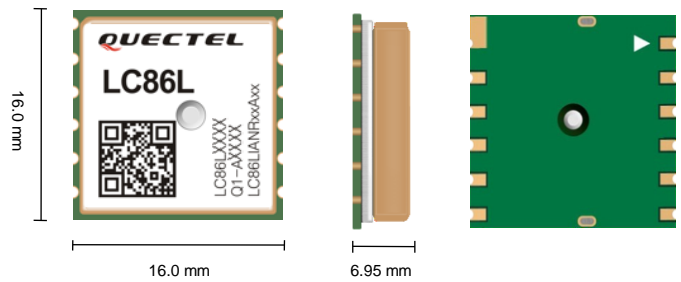

The LC86L is an ultra-compact GNSS module with an integrated patch antenna and a GNSS chipset engine that achieves perfect performance by supporting two or three concurrent GNSS constellations (Depending on the internal chipset version) and QZSS. The module is compatible with Quectel GPS module L80.

Combining advanced AGNSS and EASY™ (Embedded Assist System) with the LOCUS feature, the LC86L achieves the highest performance and fully meets the industrial standard. The EASY™ technology allows the LC86L module to calculate and predict orbits automatically by using the ephemeris data (up to 3 days) stored in an internal RAM memory. That way, the LC86L can fix the position quickly even at lower signal levels and under low power consumption. Additionally, the embedded logger function called LOCUS allows the LC86L to log position information to internal flash memory at default intervals of 15 seconds and provides typically more log capacity without any added costs.


The LC86L also supports automatic antenna switching function. The module can switch between an integrated patch antenna and an external active antenna. Moreover, the LC86L keeps tracking even during the switching process.

Due to its compact design, high precision and high sensitivity, the LC86L module is perfect solution for a wide range of M2M applications, such as portable devices, automotive applications, personal tracking, security, and industrial PDA. It is especially suitable for special applications, like GNSS mouse and OBD.



Key Features

- ✓ Extremely compact footprint: 16.0 mm × 16.0 mm × 6.95 mm
- ✓ Multi-GNSS engine for GPS, GLONASS, Galileo (or BeiDou) and QZSS
- ✓ Automatic antenna switching function
- ✓ Antenna detection and antenna short-circuit protection functions
- ✓ Support for DGPS, SBAS (WAAS/EGNOS/MSAS/GAGAN)
- ✓ AGNSS technology
- ✓ Support for EASY™, an advanced AGNSS technology (no external memory required)
- ✓ Integrated LNA for better sensitivity
- ✓ SDK commands developed by Quectel



L1 Band



Multi-Constellation System



Ultra-Compact Size



RoHS Compliant



Wide Operating Temperature:
-40 °C to +85 °C



Low Power Consumption

Quectel LC86L

GNSS Module	LC86L (A)	LC86L (B)	LC86L (C)
Region	Global	China	Global
Dimensions	16.0 mm × 16.0 mm × 6.95 mm	16.0 mm × 16.0 mm × 6.95 mm	16.0 mm × 16.0 mm × 6.95 mm
Weight	Approx. 6.0 g	Approx. 6.0 g	Approx. 6.0 g
Embedded Antenna	•	•	•
Temperature Range			
Operating Temperature	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C
Storage Temperature	-40 °C to +90 °C	-40 °C to +90 °C	-40 °C to +90 °C
GNSS Features			
Supported Bands	GPS L1 C/A, QZSS L1: 1575.42 MHz BeiDou B1I: 1561.098 MHz GLONASS L1: 1602.5625 MHz	GPS L1 C/A, QZSS L1: 1575.42 MHz BeiDou B1I: 1561.098 MHz GLONASS L1: 1602.5625 MHz	GPS L1 C/A, QZSS L1: 1575.42 MHz BeiDou B1I: 1561.098 MHz GLONASS L1: 1602.5625 MHz Galileo E1: 1575.42 MHz
Default GNSS Constellation	GPS + GLONASS + QZSS	GPS + BeiDou + QZSS	GPS + GLONASS + QZSS ^①
Number of Concurrent GNSS	2	2	3
Horizontal Position Accuracy ^②	Autonomous: 2.5 m CEP	Autonomous: 2.5 m CEP	Autonomous: 2.5 m CEP
Velocity Accuracy ^②	< 0.1 m/s	< 0.1 m/s	< 0.1 m/s
Acceleration Accuracy ^②	< 0.1 m/s ²	< 0.1 m/s ²	< 0.1 m/s ²
TTFF (with AGNSS)	Cold Start: < 15 s Warm Start: < 5 s Hot Start: < 2 s	Cold Start: < 15 s Warm Start: < 5 s Hot Start: < 2 s	Cold Start: < 15 s Warm Start: < 5 s Hot Start: < 2 s
TTFF (without AGNSS) ^②	Cold Start: < 35 s Warm Start: < 30 s Hot Start: < 2 s	Cold Start: < 35 s Warm Start: < 30 s Hot Start: < 2 s	Cold Start: < 35 s Warm Start: < 30 s Hot Start: < 2 s
Sensitivity ^③	Acquisition: -148 dBm Tracking: -166 dBm Reacquisition: -161 dBm	Acquisition: -148 dBm Tracking: -166 dBm Reacquisition: -161 dBm	Acquisition: -148 dBm Tracking: -166 dBm Reacquisition: -162 dBm
Dynamic Performance ^②	Maximum Altitude: max. 10000 m Maximum Velocity: max. 515 m/s Maximum Acceleration: 4g	Maximum Altitude: max. 10000 m Maximum Velocity: max. 515 m/s Maximum Acceleration: 4g	Maximum Altitude: max. 10000 m Maximum Velocity: max. 515 m/s Maximum Acceleration: 4g
Certifications			
Regulatory	CE	CE	CE*
Other	RoHS	RoHS	RoHS
Interfaces			
UART Interface	Adjustable: 9600 to 921600 bps Default: 9600 bps Update Rate: 1 Hz (max up to 10 Hz)	Adjustable: 9600 to 921600 bps Default: 115200 bps Update Rate: 1 Hz (max up to 10 Hz)	Adjustable: 9600 to 921600 bps Default: 9600 bps Update Rate: 1 Hz (max up to 10 Hz)
Protocols	NMEA 0183, PMTK, PQ	NMEA 0183, PMTK, PQ	NMEA 0183, PMTK, PQ
External Antenna Interface			
Antenna Type	Active	Active	Active
Active Antenna Power Supply	Internal	Internal	Internal
Electrical Features			
Supply Voltage Range	2.8–4.3 V, typ. 3.3 V	2.8–4.3 V, typ. 3.3 V	2.8–4.3 V, typ. 3.3 V
I/O Voltage	Typical 2.8 V	Typical 2.8 V	Typical 2.8 V
Current Consumption (@ 3.3 V)	Normal Operation: 32 mA @ Acquisition (GPS + GLONASS) 31 mA @ Tracking (GPS + GLONASS) Power Saving Modes: 1.8 mA @ Standby Mode 6 μA @ Backup Mode	Normal Operation: 33 mA @ Acquisition (GPS + BeiDou) 30 mA @ Tracking (GPS + BeiDou) Power Saving Modes: 1.8 mA @ Standby Mode 6 μA @ Backup Mode	Normal Operation: 32 mA @ Acquisition (GPS + GLONASS) 30 mA @ Tracking (GPS + GLONASS) Power Saving Modes: 1.8 mA @ Standby Mode 7 μA @ Backup Mode

- Notes:
- ①: Support configuration as GPS+GLONASS+ Galileo+QZSS, while the minimum baud rate is 19200 bps.
 - ②: Room temperature, all satellites at -130 dBm.
 - ③: Room temperature, demonstrated with good LNA.
 - : Supported.
 - *: Under development / Ongoing.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Quectel:](#)

[LC86LICMD](#)