


C0G (NP0) Dielectric

General Specifications



C0G (NP0) is the most popular formulation of the "temperature-compensating," EIA Class I ceramic materials. Modern C0G (NP0) formulations contain neodymium, samarium and other rare earth oxides.

C0G (NP0) ceramics offer one of the most stable capacitor dielectrics available. Capacitance change with temperature is $0 \pm 30 \text{ ppm}/^\circ\text{C}$ which is less than $\pm 0.3\%$ C from -55°C to $+125^\circ\text{C}$. Capacitance drift or hysteresis for C0G (NP0) ceramics is negligible at less than $\pm 0.05\%$ versus up to $\pm 2\%$ for films. Typical capacitance change with life is less than $\pm 0.1\%$ for C0G (NP0), one-fifth that shown by most other dielectrics. C0G (NP0) formulations show no aging characteristics.







PART NUMBER (see page 4 for complete part number explanation)



0805	5	A	101	J	A	T	2	A
Size (L" x W")	Voltage 6.3V = 6 10V = Z 16V = Y 25V = 3 50V = 5 100V = 1 200V = 2 250V = V 500V = 7	Dielectric C0G (NP0) = A	Capacitance Code (In pF) 2 Sig. Digits + Number of Zeros	Capacitance Tolerance B = $\pm 10 \text{ pF}$ ($< 10 \text{ pF}$) C = $\pm 25 \text{ pF}$ ($< 10 \text{ pF}$) D = $\pm 50 \text{ pF}$ ($< 10 \text{ pF}$) F = $\pm 1\%$ ($\geq 10 \text{ pF}$) G = $\pm 2\%$ ($\geq 10 \text{ pF}$) J = $\pm 5\%$ K = $\pm 10\%$	Failure Rate A = Not Applicable	Terminations T = Plated Ni and Sn Contact Factory For 1 = Pd/Ag Term 7 = Gold Plated NOT RoHS COMPLIANT	Packaging 2 = 7" Reel 4 = 13" Reel U = 4mm TR (01005)	Special Code A = Std. Product


Contact Factory For Multiples

NOTE: Contact factory for availability of Termination and Tolerance Options for Specific Part Numbers. Contact factory for non-specified capacitance values.

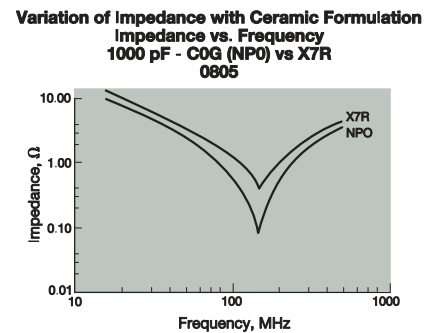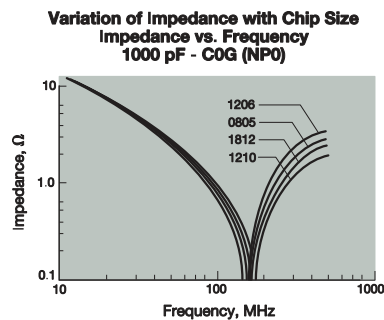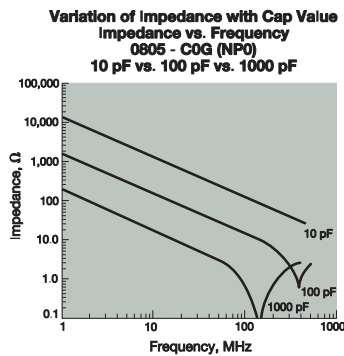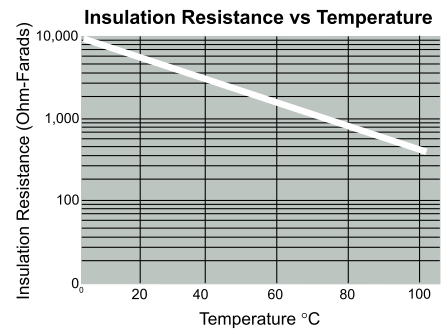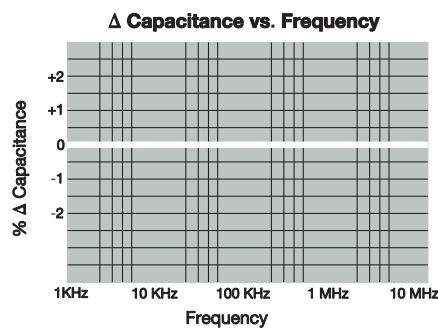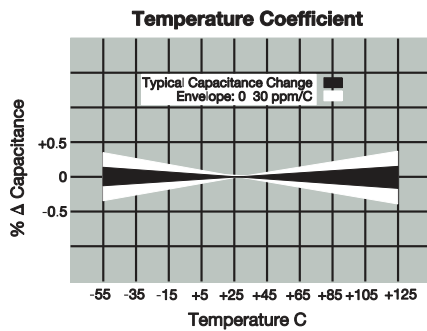

C0G (NP0) Dielectric

Specifications and Test Methods


Parameter/Test		NP0 Specification Limits	Measuring Conditions	
Operating Temperature Range		-55°C to +125°C	Temperature Cycle Chamber	
Capacitance		Within specified tolerance	Freq.: 1.0 MHz $\pm$ 10% for cap $\leq$ 1000 pF	
Q		<30 pF: Q $\geq$ 400+20 x Cap Value $\geq$ 30 pF: Q $\geq$ 1000	1.0 kHz $\pm$ 10% for cap > 1000 pF	
Insulation Resistance		100,000M Ω or 1000M Ω - μ F, whichever is less	Voltage: 1.0Vrms $\pm$.2V	
Dielectric Strength		No breakdown or visual defects	Charge device with rated voltage for 60 $\pm$ 5 secs @ room temp/humidity	
Resistance to Flexure Stresses	Appearance	No defects	Deflection: 2mm Test Time: 30 seconds 1mm/sec 	
	Capacitance Variation	$\pm$ 5% or $\pm$.5 pF, whichever is greater		
	Q	Meets Initial Values (As Above)		
	Insulation Resistance	$\geq$ Initial Value x 0.3		
Solderability		$\geq$ 95% of each terminal should be covered with fresh solder	Dip device in eutectic solder at 230 $\pm$ 5°C for 5.0 $\pm$ 0.5 seconds	
Resistance to Solder Heat	Appearance	No defects, <25% leaching of either end terminal	Dip device in eutectic solder at 260°C for 60sec- onds. Store at room temperature for 24 $\pm$ 2 hours before measuring electrical properties.	
	Capacitance Variation	$\leq$ $\pm$ 2.5% or $\pm$.25 pF, whichever is greater		
	Q	Meets Initial Values (As Above)		
	Insulation Resistance	Meets Initial Values (As Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Thermal Shock	Appearance	No visual defects	Step 1: -55°C $\pm$ 2°	30 $\pm$ 3 minutes
	Capacitance Variation	$\leq$ $\pm$ 2.5% or $\pm$.25 pF, whichever is greater	Step 2: Room Temp	$\leq$ 3 minutes
	Q	Meets Initial Values (As Above)	Step 3: +125°C $\pm$ 2°	30 $\pm$ 3 minutes
	Insulation Resistance	Meets Initial Values (As Above)	Step 4: Room Temp	$\leq$ 3 minutes
	Dielectric Strength	Meets Initial Values (As Above)	Repeat for 5 cycles and measure after 24 hours at room temperature	
Load Life	Appearance	No visual defects	Charge device with twice rated voltage in test chamber set at 125°C $\pm$ 2°C for 1000 hours (+48, -0). Remove from test chamber and stabilize at room temperature for 24 hours before measuring.	
	Capacitance Variation	$\leq$ $\pm$ 3.0% or $\pm$.3 pF, whichever is greater		
	Q (C=Nominal Cap)	$\geq$ 30 pF: Q $\geq$ 350 $\geq$ 10 pF, <30 pF: Q $\geq$ 275 +5C/2 <10 pF: Q $\geq$ 200 +10C		
	Insulation Resistance	$\geq$ Initial Value x 0.3 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Load Humidity	Appearance	No visual defects	Store in a test chamber set at 85°C $\pm$ 2°C/ 85% $\pm$ 5% relative humidity for 1000 hours (+48, -0) with rated voltage applied. Remove from chamber and stabilize at room temperature for 24 $\pm$ 2 hours before measuring.	
	Capacitance Variation	$\leq$ $\pm$ 5.0% or $\pm$.5 pF, whichever is greater		
	Q	$\geq$ 30 pF: Q $\geq$ 350 $\geq$ 10 pF, <30 pF: Q $\geq$ 275 +5C/2 <10 pF: Q $\geq$ 200 +10C		
	Insulation Resistance	$\geq$ Initial Value x 0.3 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		

C0G (NP0) Dielectric
Capacitance Range



PREFERRED SIZES ARE SHADED

SIZE		0101*			0201			0402			0603				0805					1206				
Soldering		Reflow Only			Reflow Only			Reflow/Wave			Reflow/Wave				Reflow/Wave					Reflow/Wave				
Packaging		All Paper			All Paper			All Paper			All Paper				Paper/Embossed					Paper/Embossed				
(L) Length	mm	0.40 ± 0.02 (0.016 ± 0.0008)			0.60 ± 0.09 (0.024 ± 0.004)			1.00 ± 0.10 (0.040 ± 0.004)			1.60 ± 0.15 (0.063 ± 0.006)				2.01 ± 0.20 (0.079 ± 0.008)					3.20 ± 0.20 (0.126 ± 0.008)				
W) Width	mm	0.20 ± 0.02 (0.008 ± 0.0008)			0.30 ± 0.09 (0.011 ± 0.004)			0.50 ± 0.10 (0.020 ± 0.004)			0.81 ± 0.15 (0.032 ± 0.006)				1.25 ± 0.20 (0.049 ± 0.008)					1.60 ± 0.20 (0.063 ± 0.008)				
(t) Terminal	mm	0.10 ± 0.04 (0.004 ± 0.0016)			0.15 ± 0.05 (0.006 ± 0.002)			0.25 ± 0.15 (0.010 ± 0.006)			0.35 ± 0.15 (0.014 ± 0.006)				0.50 ± 0.25 (0.020 ± 0.010)					0.50 ± 0.25 (0.020 ± 0.010)				
WVDC		16			25 50			16 25 50			16 25 50 100 200				16 25 50 100 200 250					16 25 50 100 200 250 500				
Cap (pF)	0.5		A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	1.0	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	1.2	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	1.5	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	1.8	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	2.2	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	2.7	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	3.3	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	3.9	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	4.7	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	5.6	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	6.8	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	8.2	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	10	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	12	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	15	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	18	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	22	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	27	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	33	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	39	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	47	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	56	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	68	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	82	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	100	B	A	A	C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	120				C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	150				C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	180				C	C	C	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J
	220				C	C	C	C	C	C	G	G	G	G	J	J	J	J	N	N	J	J	J	J
	270				C	C	C	C	C	C	G	G	G	G	J	J	J	J	N	N	J	J	J	J
	330				C	C	C	C	C	C	G	G	G	G	J	J	J	J	N	N	J	J	J	J
	390				C	C	C	C	C	C	G	G	G	G	J	J	J	J	N	N	J	J	J	J
	470				C	C	C	C	C	C	G	G	G	G	J	J	J	J	N	N	J	J	J	J
	560				C	C	C	C	C	C	G	G	G	G	J	J	J	J	N	N	J	J	J	J
	680				C	C	C	C	C	C	G	G	G	G	J	J	J	J	N	N	J	J	J	J
	750				C	C	C	C	C	C	G	G	G	G	J	J	J	J	N	N	J	J	J	J
	820				C	C	C	C	C	C	G	G	G	G	J	J	J	J	N	N	J	J	J	J
	1000				C	C	C	C	C	C	G	G	G	G	J	J	J	J	N	N	J	J	J	J
	1200										G	G	G	G	J	J	J	J	P	P	J	J	J	J
	1500										G	G	G	G	J	J	J	J	P	P	J	J	J	J
	1800										G	G	G	G	J	J	J	J	P	P	J	J	J	J
	2200										G	G	G	G	P	P	P	P	P	P	J	J	M	P
	2700										G	G	G	G	P	P	P	P	P	P	J	J	M	P
	3300										G	G	G	G	P	P	P	P	P	P	J	J	M	P
	3900										G	G	G	G	P	P	P	P	P	P	J	J	M	P
	4700										G	G	G	G	P	P	P	P	P	P	J	J	M	P
	5600														P	P	P	P			J	J	M	P
	6800														P	P	P	P			M	M	M	P
Cap (μF)	8200														P	P	P	P			P	P	P	P
	0.010														P	P	P	P			X	X		
	0.012														P	P	P	P			X	X		
	0.015														P	P	P	P			X	X		
	0.018														X	X	X	X			X	X		
	0.022														X	X	X	X			X	X		
	0.027														X	X	X	X			X	X		
	0.033														X	X	X	X			X	X		
	0.039														X	X	X	X			X	X		
	0.047														X	X	X	X			X	X		
	0.068														X	X	X	X						
	0.082														X	X	X	X						
	0.1														X	X	X	X						
WVDC		16			25 50			16 25 50			16 25 50 100 200				16 25 50 100 200 250					16 25 50 100 200 250 500				
SIZE		0101*			0201			0402			0603				0805					1206				



Letter	A	B	C	E	G	J	K	M	N	P	Q	X	Y	Z
Max. Thickness	0.33 (0.013)	0.22 (0.009)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)
PAPER							EMBOSSD							



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

C0G (NP0) Dielectric
Capacitance Range



PREFERRED SIZES ARE SHADED

Table with dimensions and capacitance values for various capacitor sizes (1210, 1812, 1825, 2220, 2225). Includes a diagram of a capacitor with dimensions L, W, T, and t.

Table with Letter and Max. Thickness values for different capacitor types (A, B, C, E, G, J, K, M, N, P, Q, X, Y, Z).