


LOC	DIST	REVISIONS				
HM	00	P	LTR	DESCRIPTION	DATE	OWN
			R	REV PER ECO-15-007385	20MAY2015	GG
					LS	

D

C

B

A

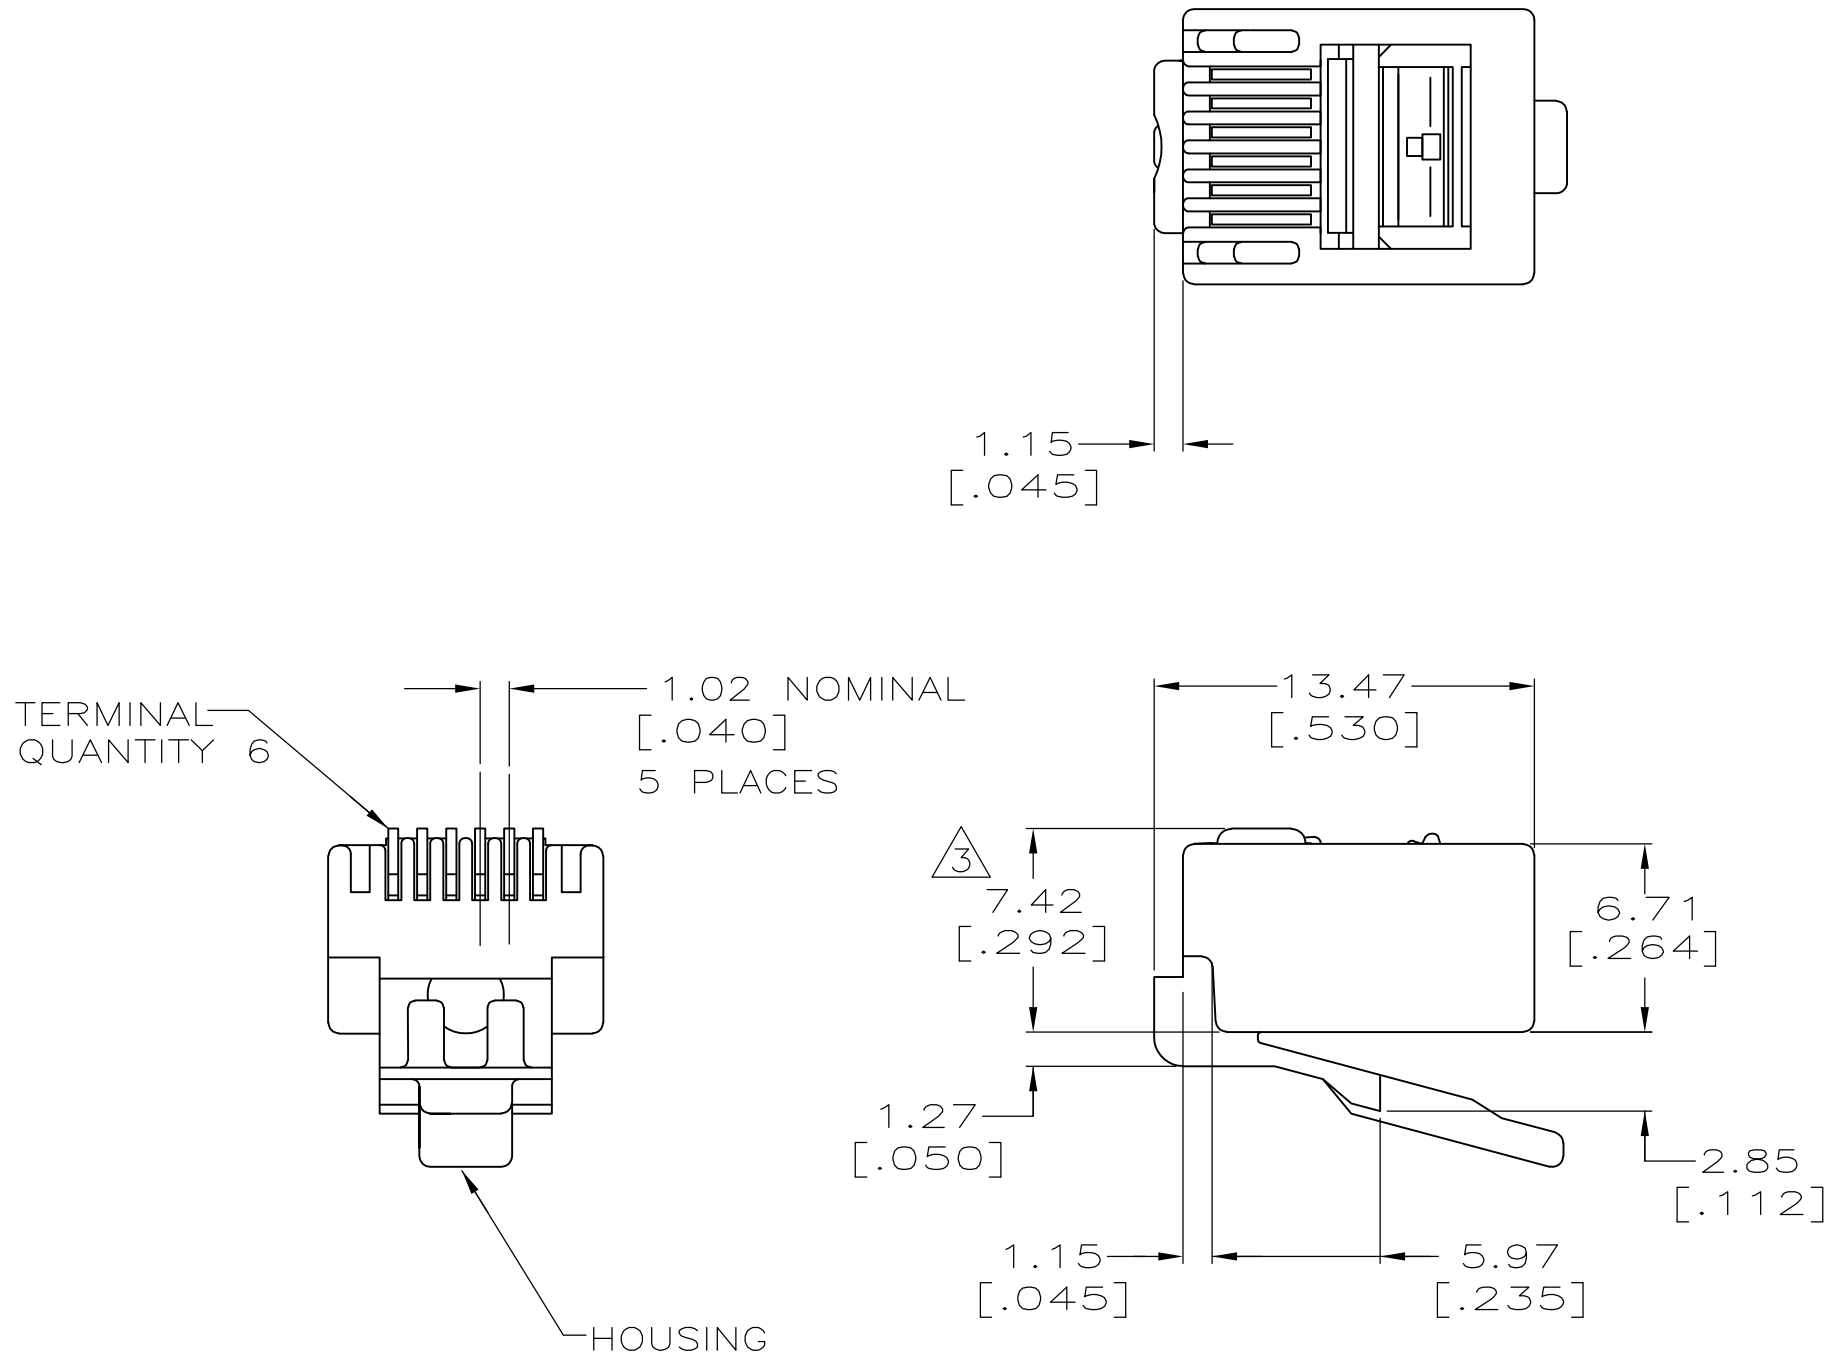

- 1 MATERIAL: HOUSING- POLYCARBONATE, CLEAR
TERMINAL- .36 [.014] THICK PHOSPHOR BRONZE PLATED WITH .178 μ m [.000007] THICK GOLD IN LOCALIZED PLATE AREA OVER .762 μ m [.000030] THICK PALLADIUM NICKEL IN LOCALIZED PLATE AREA OVER 2.54 μ m [.000100] THICK NICKEL ON ENTIRE CONTACT.
2. PLUG WILL ACCEPT 0.89[.035] DIAMETER STRANDED, 26 OR 28 AWG, OR TINSEL 28 AWG WIRE WITH A 4.58[.180] DIAMETER MAXIMUM JACKET.
- 3 TERMINATED DIMENSION 6.15[.242] MAXIMUM.
- 5 DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 6 10,000 ASSEMBLIES PER PACKAGE.
- 7 1000 ASSEMBLIES PER PACKAGE.
- 8 100 ASSEMBLIES PER PACKAGE.

SUPERSEDED BY: 5-554710-2
OBSOLETE

8 7 6	LOOSE PIECE	5-554710-3
		5-554710-2
		5-554710-1
	REELED	554710-1
PACKAGED	DESCRIPTION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. HALL 11DEC2007	TE Connectivity	
DIMENSIONS: mm[INCHES]		CHK B. MCNEILL 11DEC2007		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD B. MCNEILL 11DEC2007	NAME	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -		PRODUCT SPEC 108-1163 APPLICATION SPEC 114-6016	MODULAR PLUG ASSEMBLY, 6 POSITION, ROUND CABLE -	
MATERIAL - 1		WEIGHT -	SIZE A2	CAGE CODE 00779
		CUSTOMER DRAWING	DRAWING NO G-554710	RESTRICTED TO -
		SCALE 4:1	SHEET 1 of 1	REV R

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity Divested:](#)

[5-554710-2](#)